



COLLECTION 2025



COMMERCIAL

Sheet vinyl flooring

About IVC Commercial

Unlock high performance and style with IVC Commercial. Our affordable heterogenous vinyl floors are available in an unrivalled variety of designs, combining quality, durability and ease of installation and maintenance. As part of Unilin, global flooring specialists, we are experts in flooring for housing, education, healthcare, offices, hospitality and leisure projects. Our compact, safety and acoustic floors excel in both look and feel, meeting the challenges of commercial environments. Designed and produced in Europe, our floors are trusted across the world.

For more information, contact
info@ivc-commercial.com
www.ivc-commercial.com



COLLECTION 2025

NOOSA T95

Contents

PRODUCT COMPOSITION	04
COMPACT FLOORING	06
RANGER	08
IPERFORM 70	14
ADRIATICO 70	28
TEMPO	30
CENTRA 70	38
SAFETY FLOORING	44
ISAFE 70	46
ACOUSTIC FLOORING	52
OPTIMISE 70	54
PIONIEER	64
VOYAGER NXT	70
ACOUSTIC FLOORING SEMI-LOOSE LAY / LOOSE LAY	74
SILENTO 55	76
NOMAD	82
ACOUSTIC TEXTILE FLOORING SEMI-LOOSE LAY	84
LOGITEX ULTIMATE 55	86
NERUTEX	92
GENERAL AND TECHNICAL INFORMATION	98
OUR SUSTAINABILITY JOURNEY	118


If it matters to you, it matters to us.
We have a proven track record
in responsible production,
design versatility and unmatched
customer service.

For top quality and value for money,
you can be confident that our floors
meet every challenge.



Product composition

Compact flooring

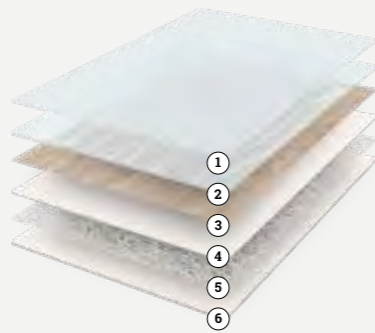


- 1 Polyurethane layer Hyperguard+
- 2 Wear layer
- 3 Design print layer
- 4 Compact print layer
- 5 Glass fibre
- 6 Compact backing

The perfect blend of strength and beauty

- Wear performance
- Impact resistant
- Lowest residual indentation
- Strong

Available in these collections:
Ranger, lperform 70, Adriatico 70, Tempo and **Centra** - pages 6-43

Safety flooring

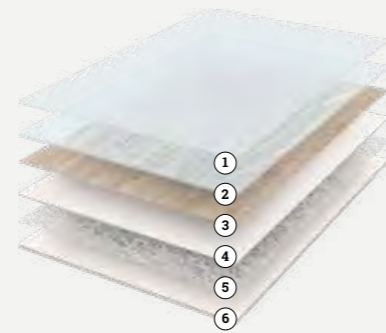

- 1 Polyurethane layer HyperGrip
- 2 Wear layer with slip-resistant particles
- 3 Design print layer
- 4 Compact print layer
- 5 Glass fibre
- 6 Compact backing

Safety, performance and good looks combined

- Permanent slip resistance
- Wear performance
- Impact resistant
- Lowest residual indentation
- Strong

Available in this collection:
Isafe 70 - pages 44-53

Acoustic flooring




- 1 Polyurethane layer Hyperguard+
- 2 Wear layer
- 3 Design print layer
- 4 Compact print layer
- 5 Glass fibre
- 6 Acoustic backing

For quiet, comfortable spaces to enhance wellbeing

- Reduces noise levels
- Great comfort underfoot

Available in these collections:
Optimise 70, Pioneer, Voyager NXT and **Silento 55** - pages 54-75

Acoustic flooring: loos lay

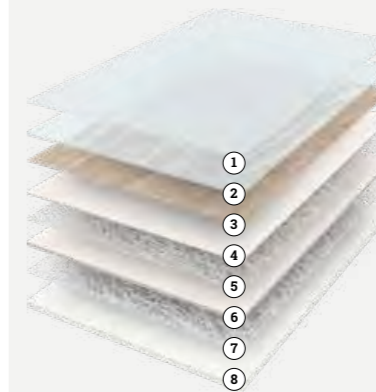

- 1 Polyurethane layer Hyperguard+
- 2 Wear layer
- 3 Design print layer
- 4 Compact print layer
- 5 Glass fibre 1
- 6 Compact backing 1
- 7 Glass fibre 2
- 8 Backing 2

Quick installation and superior noise reduction

- Easy to install
- Time saving
- Easy to recycle

Available in this collection:
Nomad - pages 76-85

Acoustic flooring: semi-loos lay



- 1 Polyurethane layer Hyperguard+
- 2 Wear layer
- 3 Design print layer
- 4 Foamed print layer
- 5 Glass fibre
- 6 PVC backing layer
- 7 Textile backing

Where luxury meets versatility

- Reduces noise levels
- Easy to install
- Time saving
- Less subfloor preparation
- Soft underfoot

Available in these collections:
Logitex Ultimate 55 and **Nerutex** - pages 86-97

Compact flooring. The perfect blend of strength and beauty



A durable solution for high-traffic spaces, our premium-quality compact flooring is strong and impact resistant, with the lowest residual indentation of all our ranges. Versatile in any environment, it excels in withstanding wear from rolling or heavy objects. Easy to install and available in a wide variety of inspiring designs, it also offers hygienic and slip-resistant features.

RANGER	08
IPERFORM 70	14
ADRIATICO 70	28
TEMPO	30
CENTRA 70	38
TECHNICAL INFO	98



1 Fiction
Science
History
Sport
Art & Culture

0 Reception
Children
Study Room
Traveling
Activities

-1 Parking
Restrooms

Compact flooring



Ranger

Compact flooring


- **Class 34** Commercial very heavy
- **Class 43** Light industrial heavy
- **Wear layer** 0,80 mm
- **Total thickness** 2,00 mm
- **Width** 2 - 4 m
- **Wear layer PUR treatment** PUR shield
- **Type of installation** Glued
- **Warranty** 20 years



NEW COLLECTION

Ranger / Compact flooring


Compact flooring



Vermont S30
LRV 49 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm




Vermont S52
LRV 42 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm




Vermont S95
LRV 36 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm




Vermont S40
LRV 30 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm




Lirac S36
LRV 18 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm

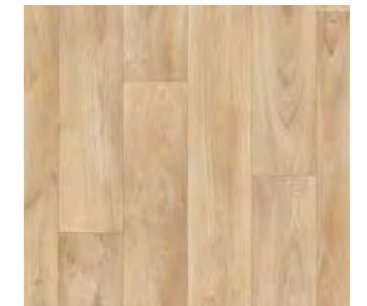

Lirac S30
LRV 43 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Lirac S90
LRV 31 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm

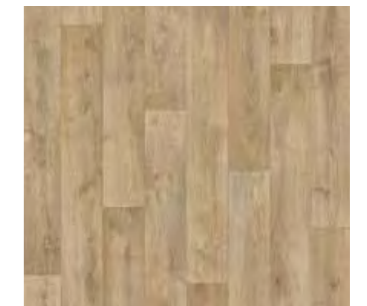


Lirac S42
LRV 35 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



DEVON M11 / DEVON M66 / DEVON M34



Devon M55
LRV 44 - 2/4 m
PR: 100 x 100 cm



Devon M09
LRV 46 - 2/4 m
PR: 100 x 100 cm



Devon M77
LRV 25 - 2/4 m
PR: 100 x 100 cm



Devon M90
LRV 30 - 2/4 m
PR: 100 x 100 cm



Devon M44
LRV 21 - 2/4 m
PR: 100 x 100 cm



Devon M22
LRV 40 - 2/4 m
PR: 100 x 100 cm



Devon M95
LRV 17 - 2/4 m
PR: 100 x 100 cm



Devon M98
LRV 9 - 2/4 m
PR: 100 x 100 cm



Devon M34
LRV 46 - 2/4 m
PR: 100 x 100 cm



Devon M66
LRV 31 - 2/4 m
PR: 100 x 100 cm



Devon M11
LRV 16 - 2/4 m
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



Bronx G90
LRV 32 - 2/4 m
PR: 100 x 100 cm



Bronx G33
LRV 43 - 2/4 m
PR: 100 x 100 cm



Bronx G96
LRV 21 - 2/4 m
PR: 100 x 100 cm



Regina S98
LRV 26 - 2/4 m
PR: 100 x 100 cm



Regina S99
LRV 16 - 2/4 m
PR: 100 x 100 cm



REGINA S93



Regina S93
LRV 33 - 2/4 m
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat

Iperform 70

Compact flooring

- **Class 34** Commercial very heavy
- **Class 43** Light industrial heavy
- **Wear layer** 0,70 mm
- **Total thickness** 2,15 mm
- **Width** 2 - 4 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Glued
- **Sanitec®**
- **Performance barrier**
- **Warranty** 15 years



HYPERGUARD+



SANITEC®



PHTHALATE FREE



EASY CLEAN



15 YEARS WARRANTY




VERSATILE DESIGN




INTENSE USAGE


Iperform 70 / Compact flooring



Coronet T94
LRV 52 - 2/4 m
PR: 99,5 x 100 cm



Galibier T92
LRV 37 - 2/4 m
PR: 99,5 x 100 cm

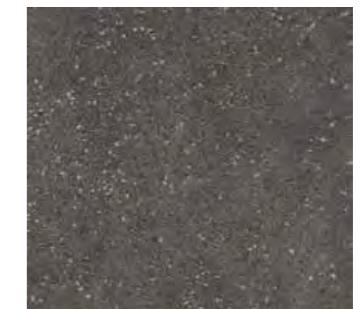


Galibier T95
LRV 12 - 2/4 m
PR: 99,5 x 100 cm



Cevennes T03
LRV 71 - 2/4 m
PR: 100 x 100 cm



Cevennes T94
LRV 48 - 2/4 m
PR: 100 x 100 cm



Populo T93
LRV 41 - 2/4 m
PR: 100 x 100 cm




Populo T97
LRV 18 - 2/4 m
PR: 100 x 100 cm



Also available in Isafe 70

Also available in Optimise 70

LRV - Light Reflectance Value / PR - Pattern Repeat

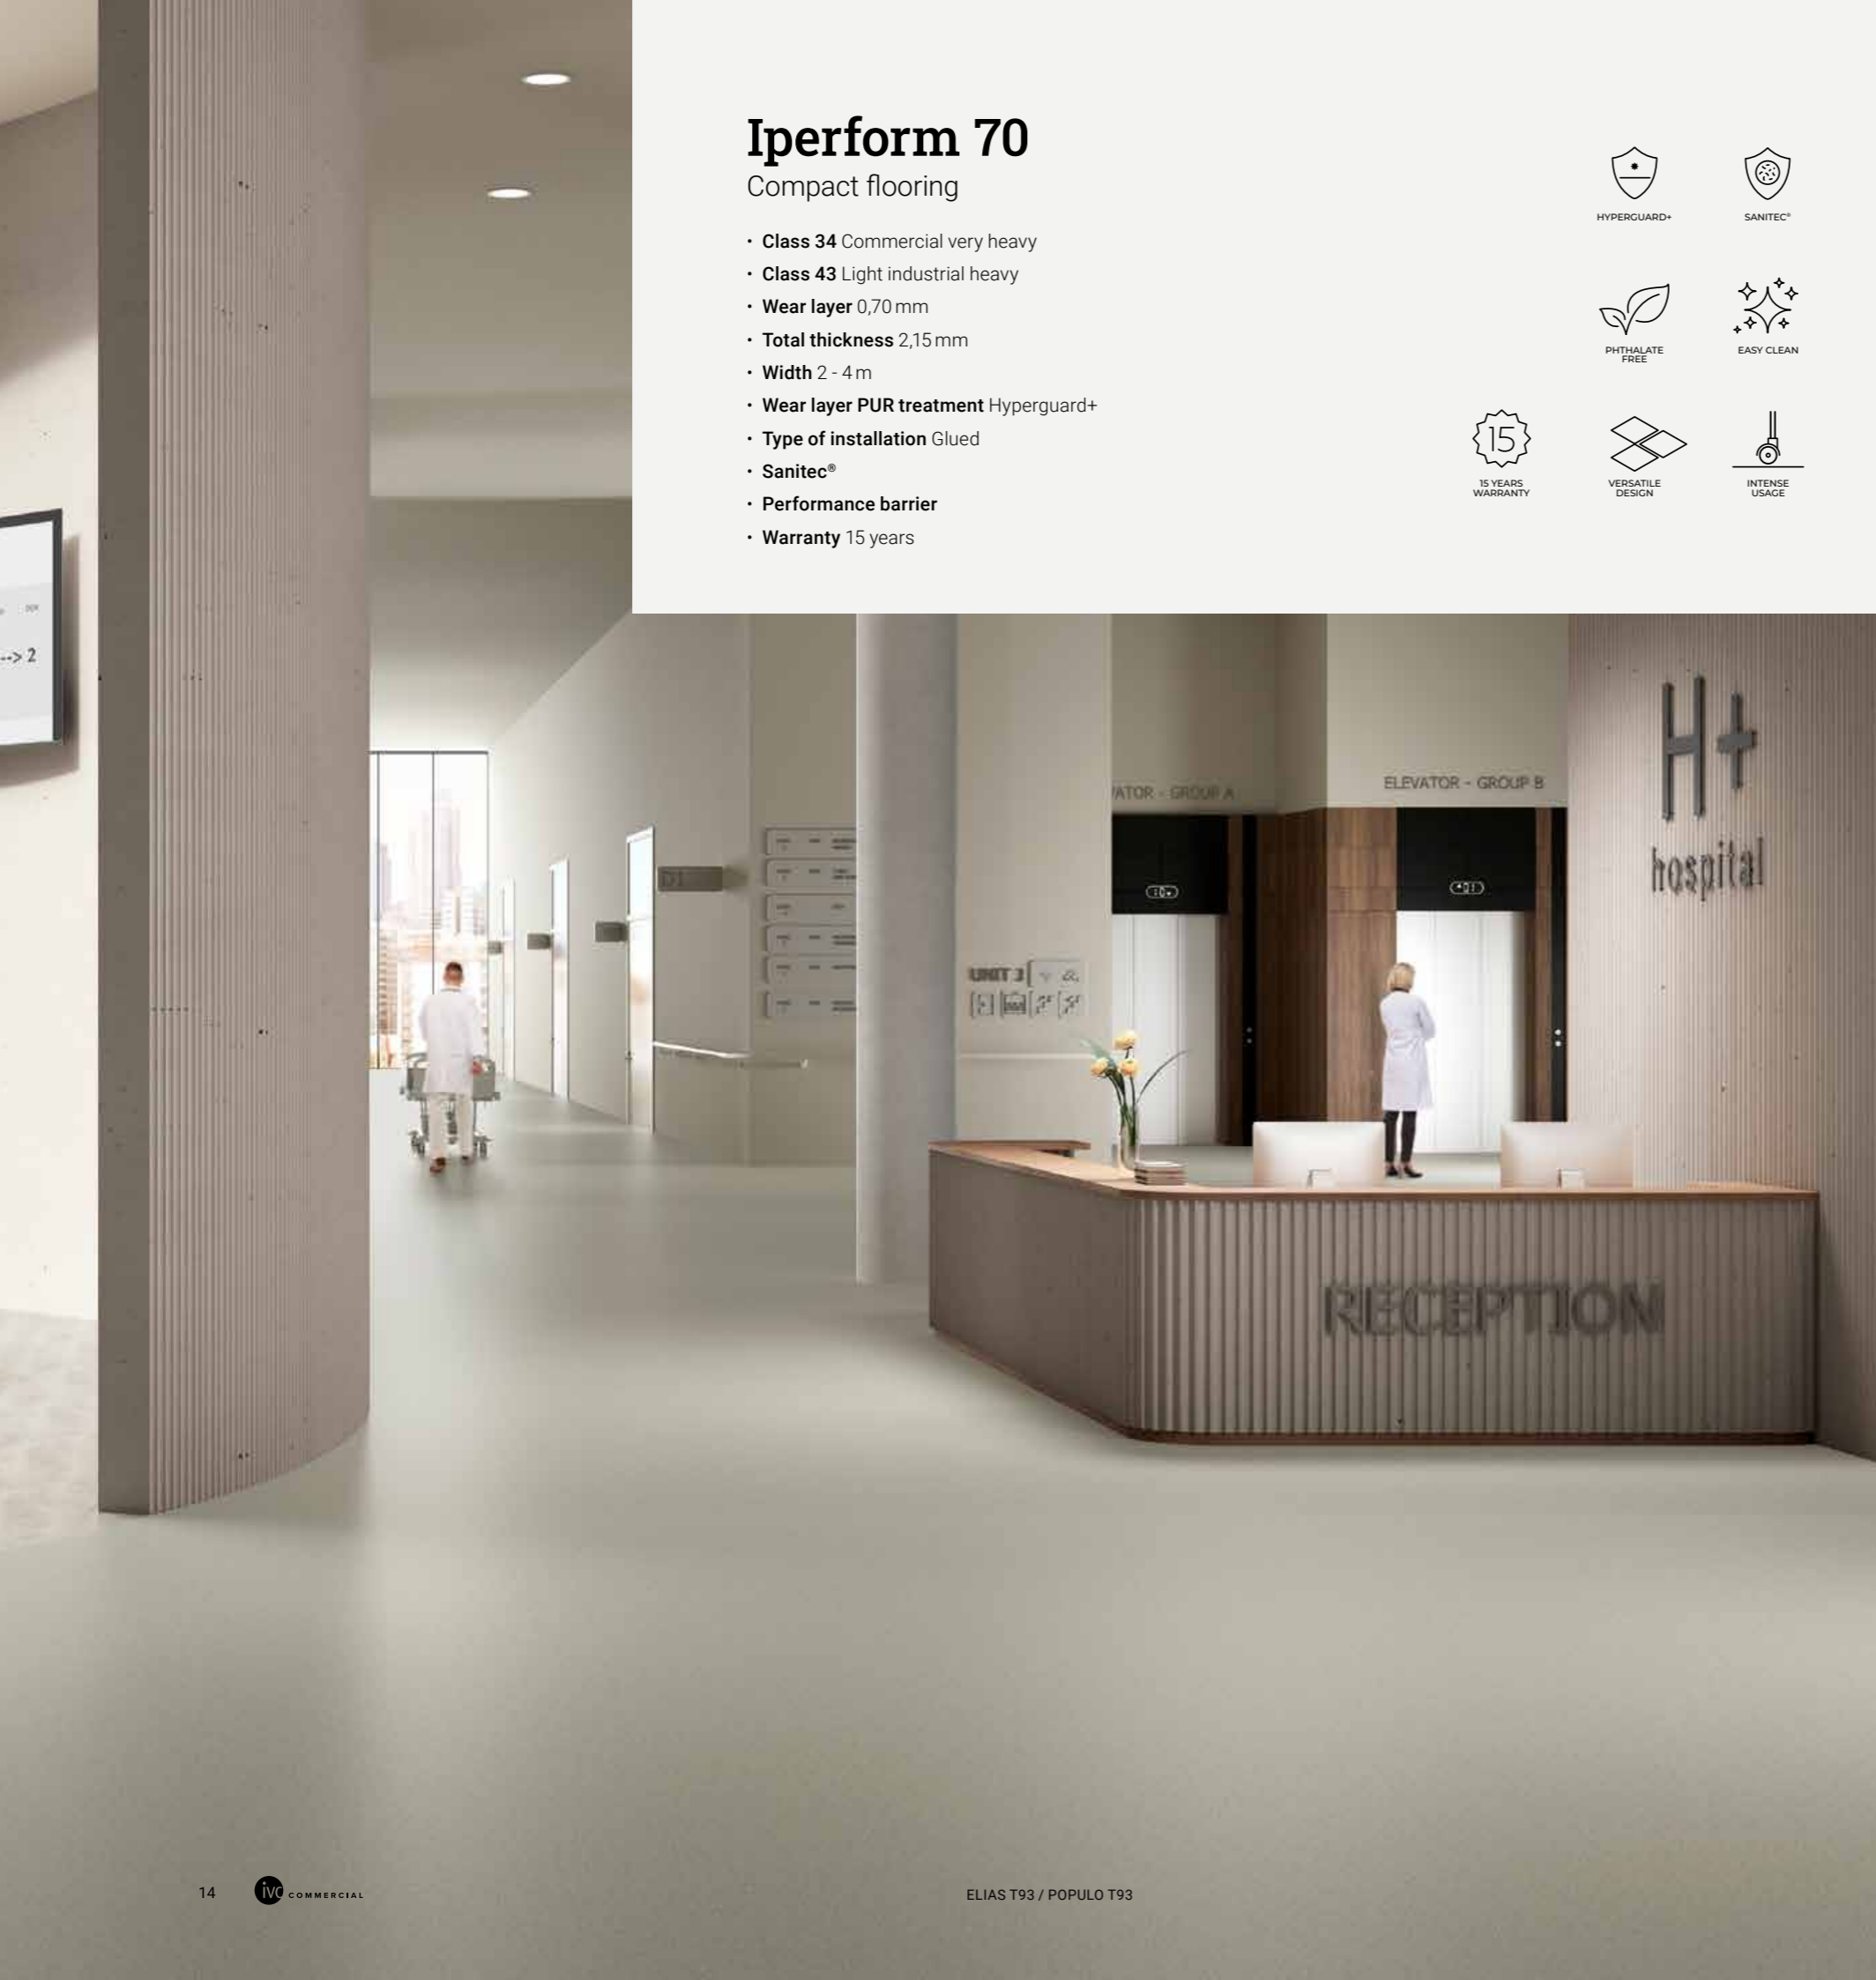



ROCHUS T76 / MAIRA T76




Maira T56
LRV 66 - 2/4 m
PR: 199 x 100 cm



Maira T76
LRV 65 - 2/4 m
PR: 199 x 100 cm



Rochus T76
LRV 21 - 2/4 m
PR: 100 x 100 cm



Sand T62
LRV 36 - 2/4 m
PR: 100 x 100 cm



Sand T22
LRV 47 - 2/4 m
PR: 100 x 100 cm



Sand T72
LRV 22 - 2/4 m
PR: 100 x 100 cm



Sand T23
LRV 20 - 2/4 m
PR: 100 x 100 cm




Sand T84
LRV 36 - 2/4 m
PR: 100 x 100 cm




Sand T97
LRV 17 - 2/4 m
PR: 100 x 100 cm



Sand T31
LRV 40 - 2/4 m
PR: 100 x 100 cm




Rochus T56
LRV 48 - 2/4 m
PR: 100 x 100 cm




Rochus T93
LRV 47 - 2/4 m
PR: 100 x 100 cm



Rochus T66
LRV 34 - 2/4 m
PR: 100 x 100 cm



Rochus T26
LRV 43 - 2/4 m
PR: 100 x 100 cm



Rochus T97
LRV 26 - 2/4 m
PR: 100 x 100 cm



Also available in Optimise 70

Also available in Isafe 70

LRV - Light Reflectance Value / PR - Pattern Repeat



NOOSA T95



Pinnacles T08
LRV 43 - 2/4 m
PR: 100 x 100 cm




Pinnacles T90
LRV 26 - 2/4 m
PR: 100 x 100 cm



Pinnacles T83
LRV 27 - 2/4 m
PR: 100 x 100 cm



Pinnacles T98
LRV 14 - 2/4 m
PR: 100 x 100 cm

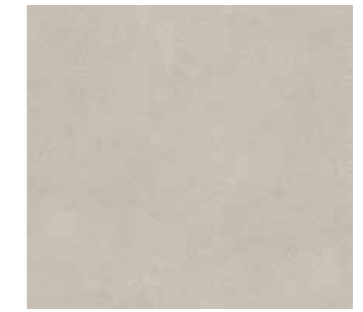

Gravel T92
LRV 31 - 2/4 m
PR: 100 x 100 cm



Styx T07
LRV 50 - 2/4 m
PR: 199 x 100 cm



Styx T39
LRV 35 - 2/4 m
PR: 199 x 100 cm



Styx T98
LRV 25 - 2/4 m
PR: 199 x 100 cm



Noosa T95
LRV 20 - 2/4 m
PR: 199 x 100 cm



Noosa T92
LRV 23 - 2/4 m
PR: 199 x 100 cm



Noosa T98
LRV 16 - 2/4 m
PR: 199 x 100 cm



Also available in Optimise 70

LRV - Light Reflectance Value / PR - Pattern Repeat



Noemi T91
LRV 31 - 2/4 m
PR: 100 x 100 cm



Noemi T35
LRV 29 - 2/4 m
PR: 100 x 100 cm




Noemi T04
LRV 49 - 2/4 m
PR: 100 x 100 cm



NOEMI T04

LRV - Light Reflectance Value / PR - Pattern Repeat


Iperform 70 / Compact flooring




Tavel T02
LRV 47 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Tavel T30
LRV 27 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm




Tavel T50
LRV 32 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm




Tavel T95
LRV 38 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Toronto T91
LRV 52 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T93
LRV 36 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T96
LRV 28 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T87
LRV 22 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T99
LRV 9 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Elias T32
LRV 39 - 2/4 m
Seamless
PR: 100 x 150 cm



Elias T93
LRV 29 - 2/4 m
Seamless
PR: 100 x 150 cm



LRV - Light Reflectance Value / PR - Pattern Repeat

Also available in Optimise 70

Also available in Isafe 70



Compact flooring

GRAVEL T92 / SCARLET T90



Scarlet T90
LRV 17 - 2/4 m
Seamless
PR: 100 x 100 cm




Scarlet T40
LRV 34 - 2/4 m
Seamless
PR: 100 x 100 cm






CAMARGUE T62



Botticelli T82
LRV 46 - 2/4 m
PS: 12,5 x 60 cm
PR: 100 x 120 cm




Botticelli T93
LRV 40 - 2/4 m
PS: 12,5 x 60 cm
PR: 100 x 120 cm

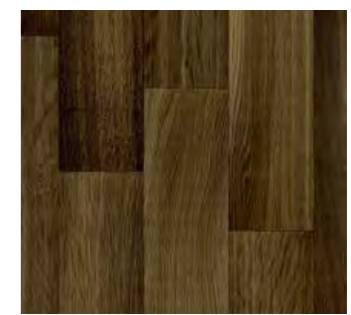


Botticelli T88
LRV 9 - 2/4 m
PS: 12,5 x 60 cm
PR: 100 x 120 cm




Camargue T53
LRV 48 - 2/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Camargue T04
LRV 29 - 2/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm

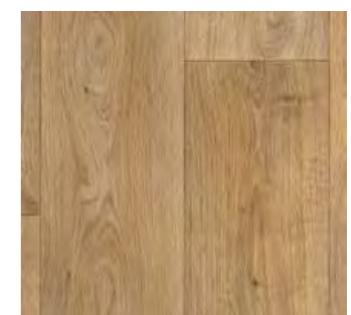


Calais T34
LRV 36 - 2/4 m
PS: 20 x 120 cm
PR: 100 x 120 cm




Camargue T58
LRV 30 - 2/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm



Camargue T83
LRV 24 - 2/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm

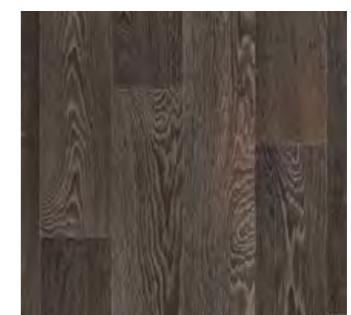

Camargue T91
LRV 15 - 2/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm



Camargue T62
LRV 34 - 2/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm

Also available in Optimise 70

LRV - Light Reflectance Value / PR - Pattern Repeat



Olympus T91
LRV 30 - 2/4 m
25 x seamless
PR: 100 x 150 cm



Olympus T33
LRV 36 - 2/4 m
25 x seamless
PR: 100 x 150 cm



Patagonia T34
LRV 36 - 2/4 m
PS: 11,8 x 47,2 cm
PR: 199 x 100 cm



PATAGONIA T34

LRV - Light Reflectance Value / PR - Pattern Repeat

Also available in Optimise 70

Adriatico 70

Compact flooring

- **Class 34** Commercial very heavy
- **Class 42** Light industrial heavy
- **Wear layer** 0,70 mm
- **Total thickness** 2,00 mm
- **Width** 2 - 4 m
- **Wear layer PUR treatment** PUR shield
- **Type of installation** Glued
- **Warranty** 7 years



INVERTECH



PUR SHIELD





INTENSE USAGE




CHIPS

NEW COLLECTION

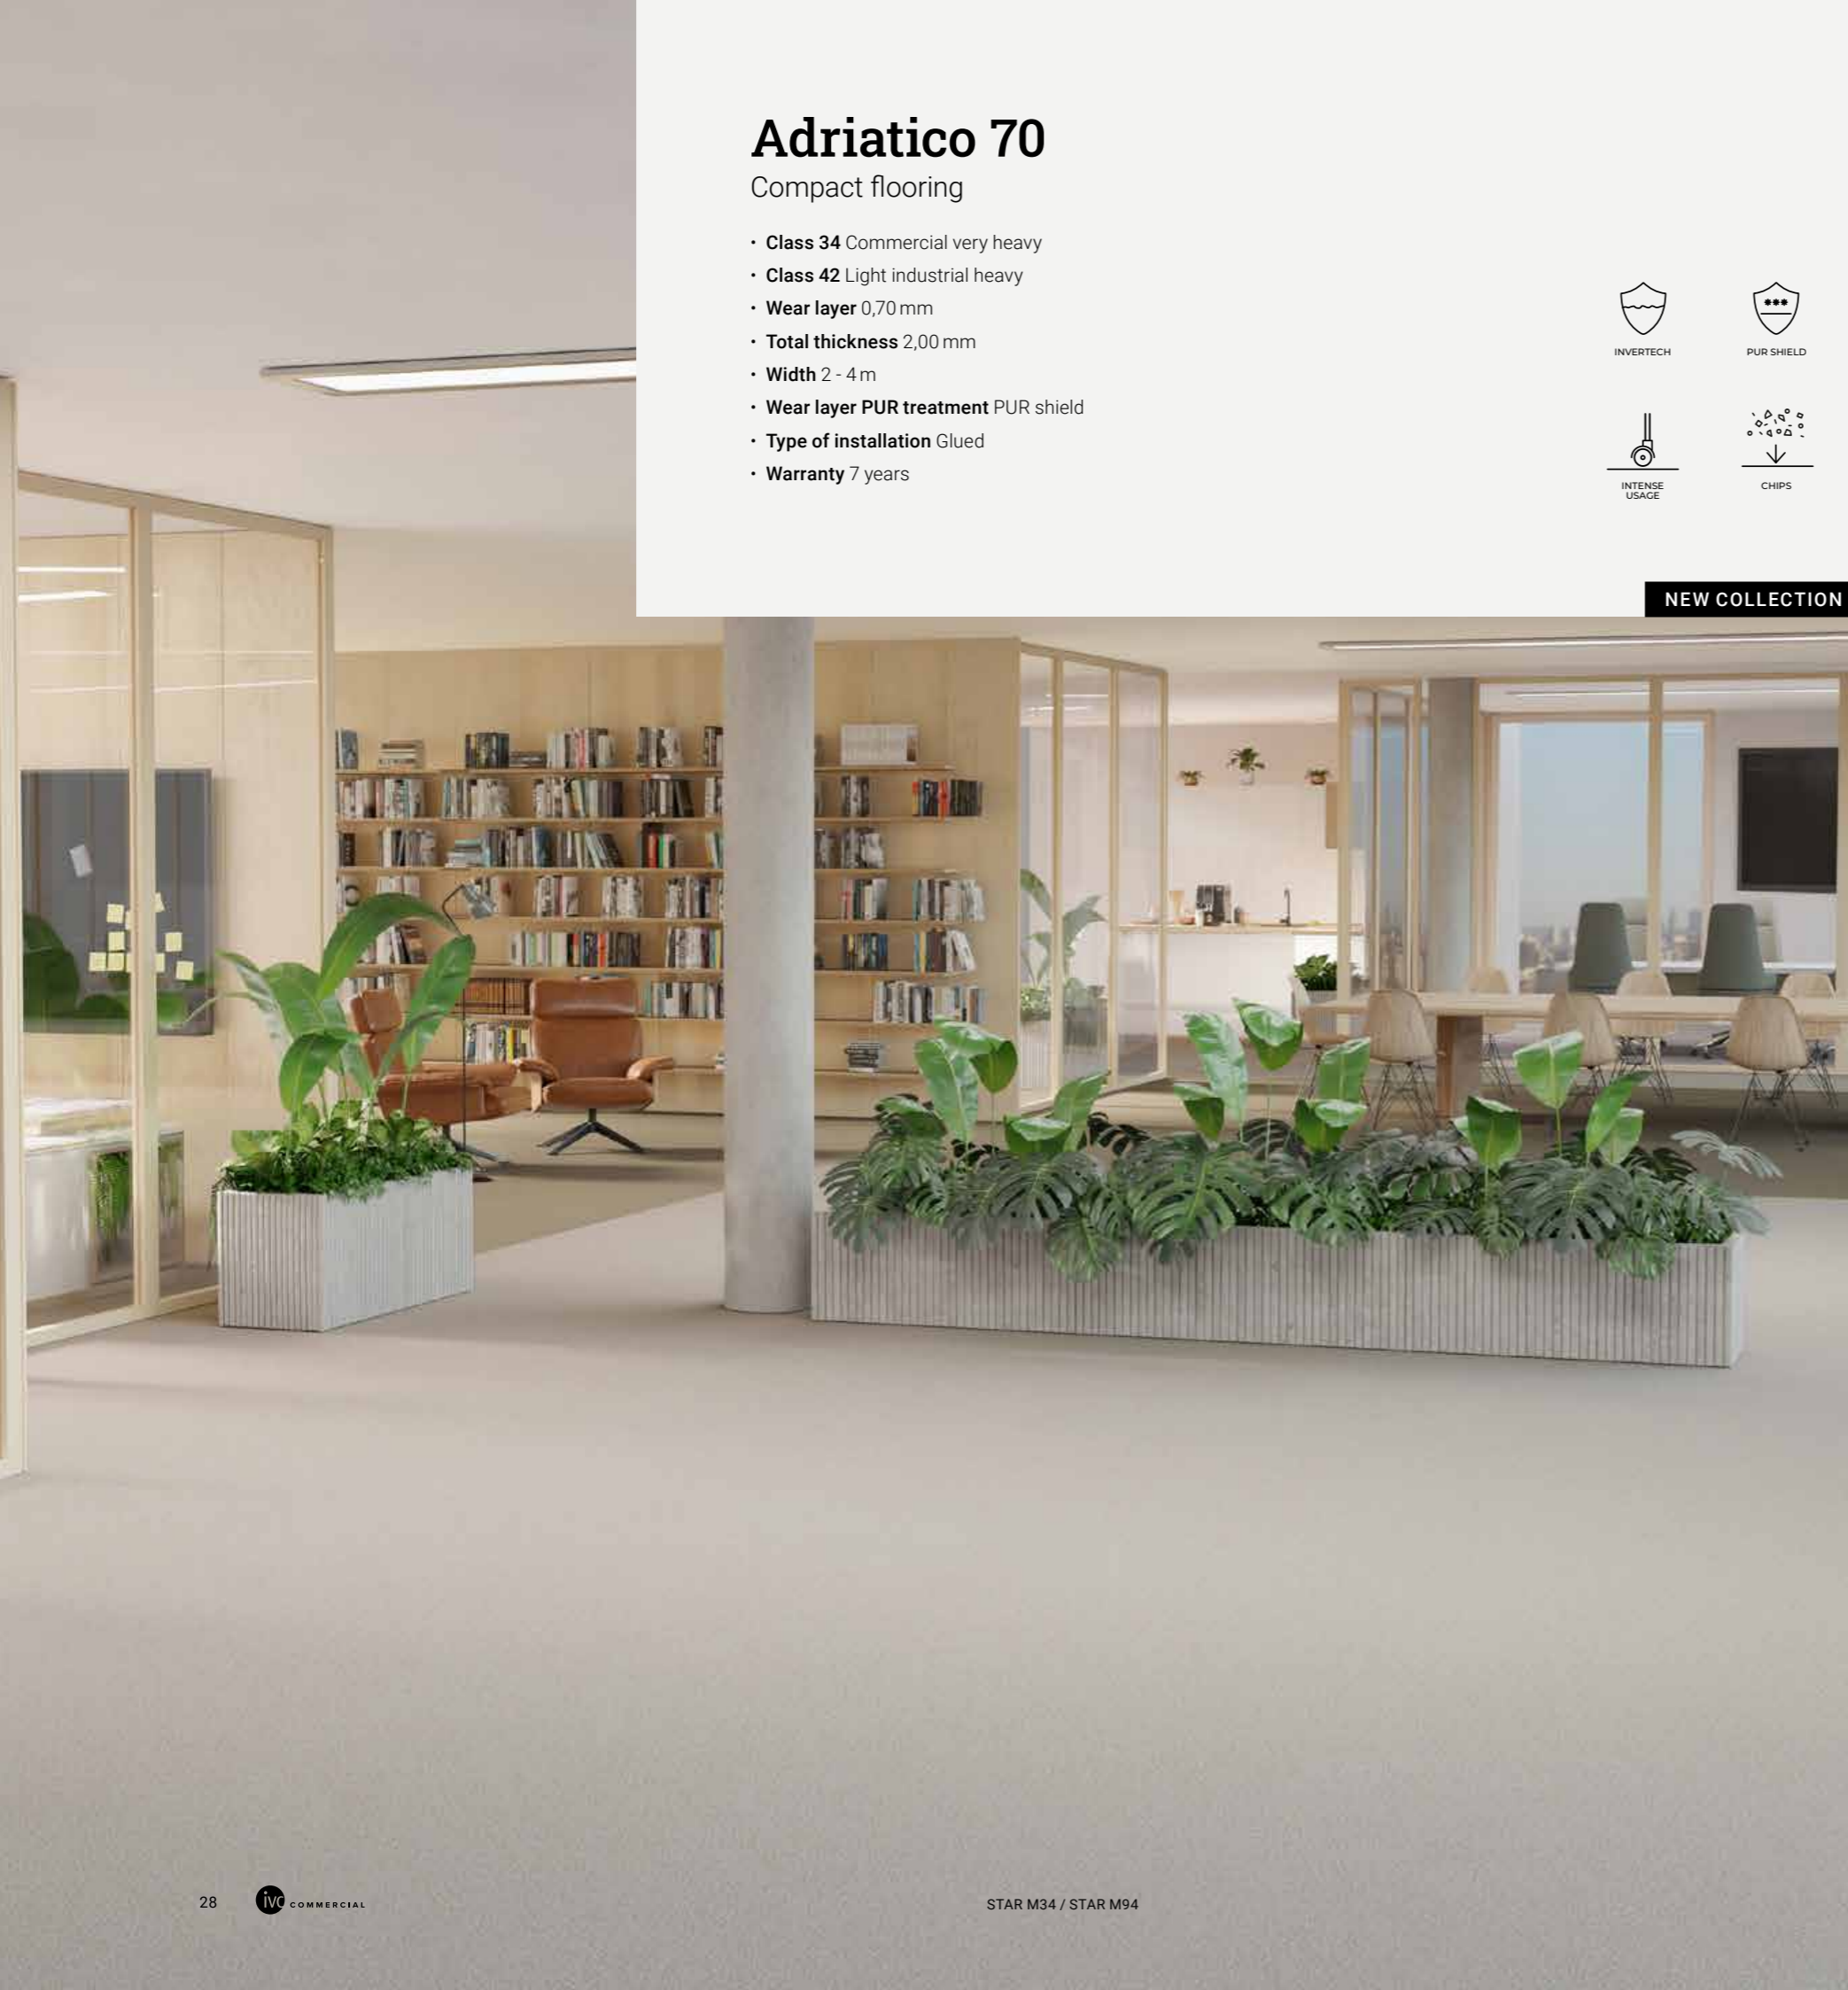

Star M96
LRV 19 - 2/4 m
PR: 100 x 100 cm

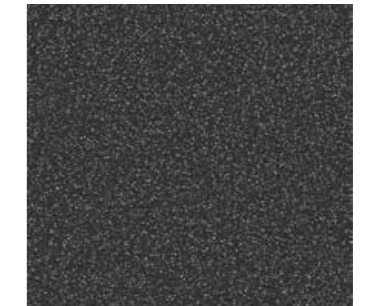


Star M97
LRV 12 - 2/4 m
PR: 100 x 100 cm



Star M37
LRV 40 - 2/4 m
PR: 100 x 100 cm



Star M74
LRV 22 - 2/4 m
PR: 100 x 100 cm



Star M34
LRV 29 - 2/4 m
PR: 100 x 100 cm



Star M94
LRV 42 - 2/4 m
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



Tempo

Compact flooring

- **Class 23** Domestic heavy
- **Class 33** Commercial heavy
- **Wear layer** 0,50 mm
- **Total thickness** 2,00 mm
- **Width** 2 - 4 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Glued
- **Seamless V-grout**
- **Enhanced surface technology**
- **Supercompact black backing**
- **Warranty** 12 years



NEW COLLECTION



Tempo / Compact flooring


Compact flooring




Chestnut Oak W37
2/4 m
PS: 20 x 150
PR: 199 x 150 cm



Chestnut Oak W35
2/4 m
PS: 20 x 150
PR: 199 x 150 cm



Parker Oak W48
2/4 m
PS: 20 x 150
PR: 199 x 150 cm

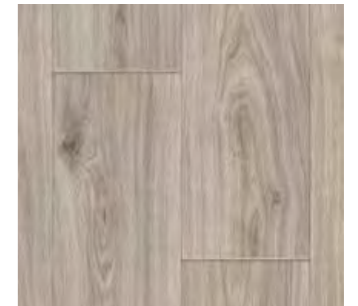

Parker Oak W93
2/4 m
PS: 20 x 150
PR: 199 x 150 cm



Barbellino Oak 538
2/4 m
PS: 11,80 x 47,10
PR: 199 x 100 cm



Barbellino Oak 595
2/4 m
PS: 11,80 x 47,10
PR: 199 x 100 cm




Barbellino Oak 548
2/4 m
PS: 11,80 x 47,10
PR: 199 x 100 cm




PR - Pattern Repeat




ABRUZZO OAK V33




Brunel Oak W33
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm




Brunel Oak W44
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm




Cabral Oak W34
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm



Pollino Oak W94
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm



Pollino Oak W49
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm




Pollino Oak W38
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm



Abruzzo Oak V95
2/4 m
PS: 16,60 x 150 cm
PR: 199 x 150 cm



Abruzzo Oak V48
2/4 m
PS: 16,60 x 150 cm
PR: 199 x 150 cm




Abruzzo Oak V46
2/4 m
PS: 16,60 x 150 cm
PR: 199 x 150 cm



Abruzzo Oak V33
2/4 m
PS: 16,60 x 150 cm
PR: 199 x 150 cm




PR - Pattern Repeat




Foxtail Pine W92
2/4 m
PS: 20 x 150 cm
PR: 99,5 x 150 cm




Tuscan Oak 538
2/4 m
PS: 33,30 x 10cm
PR: 199 x 150 cm




Caprera Oak W44
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm



Caprera Oak W34
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm



Noble Oak W32
2/4 m
PS: 20 x 150 cm
PR: 199 x 150 cm

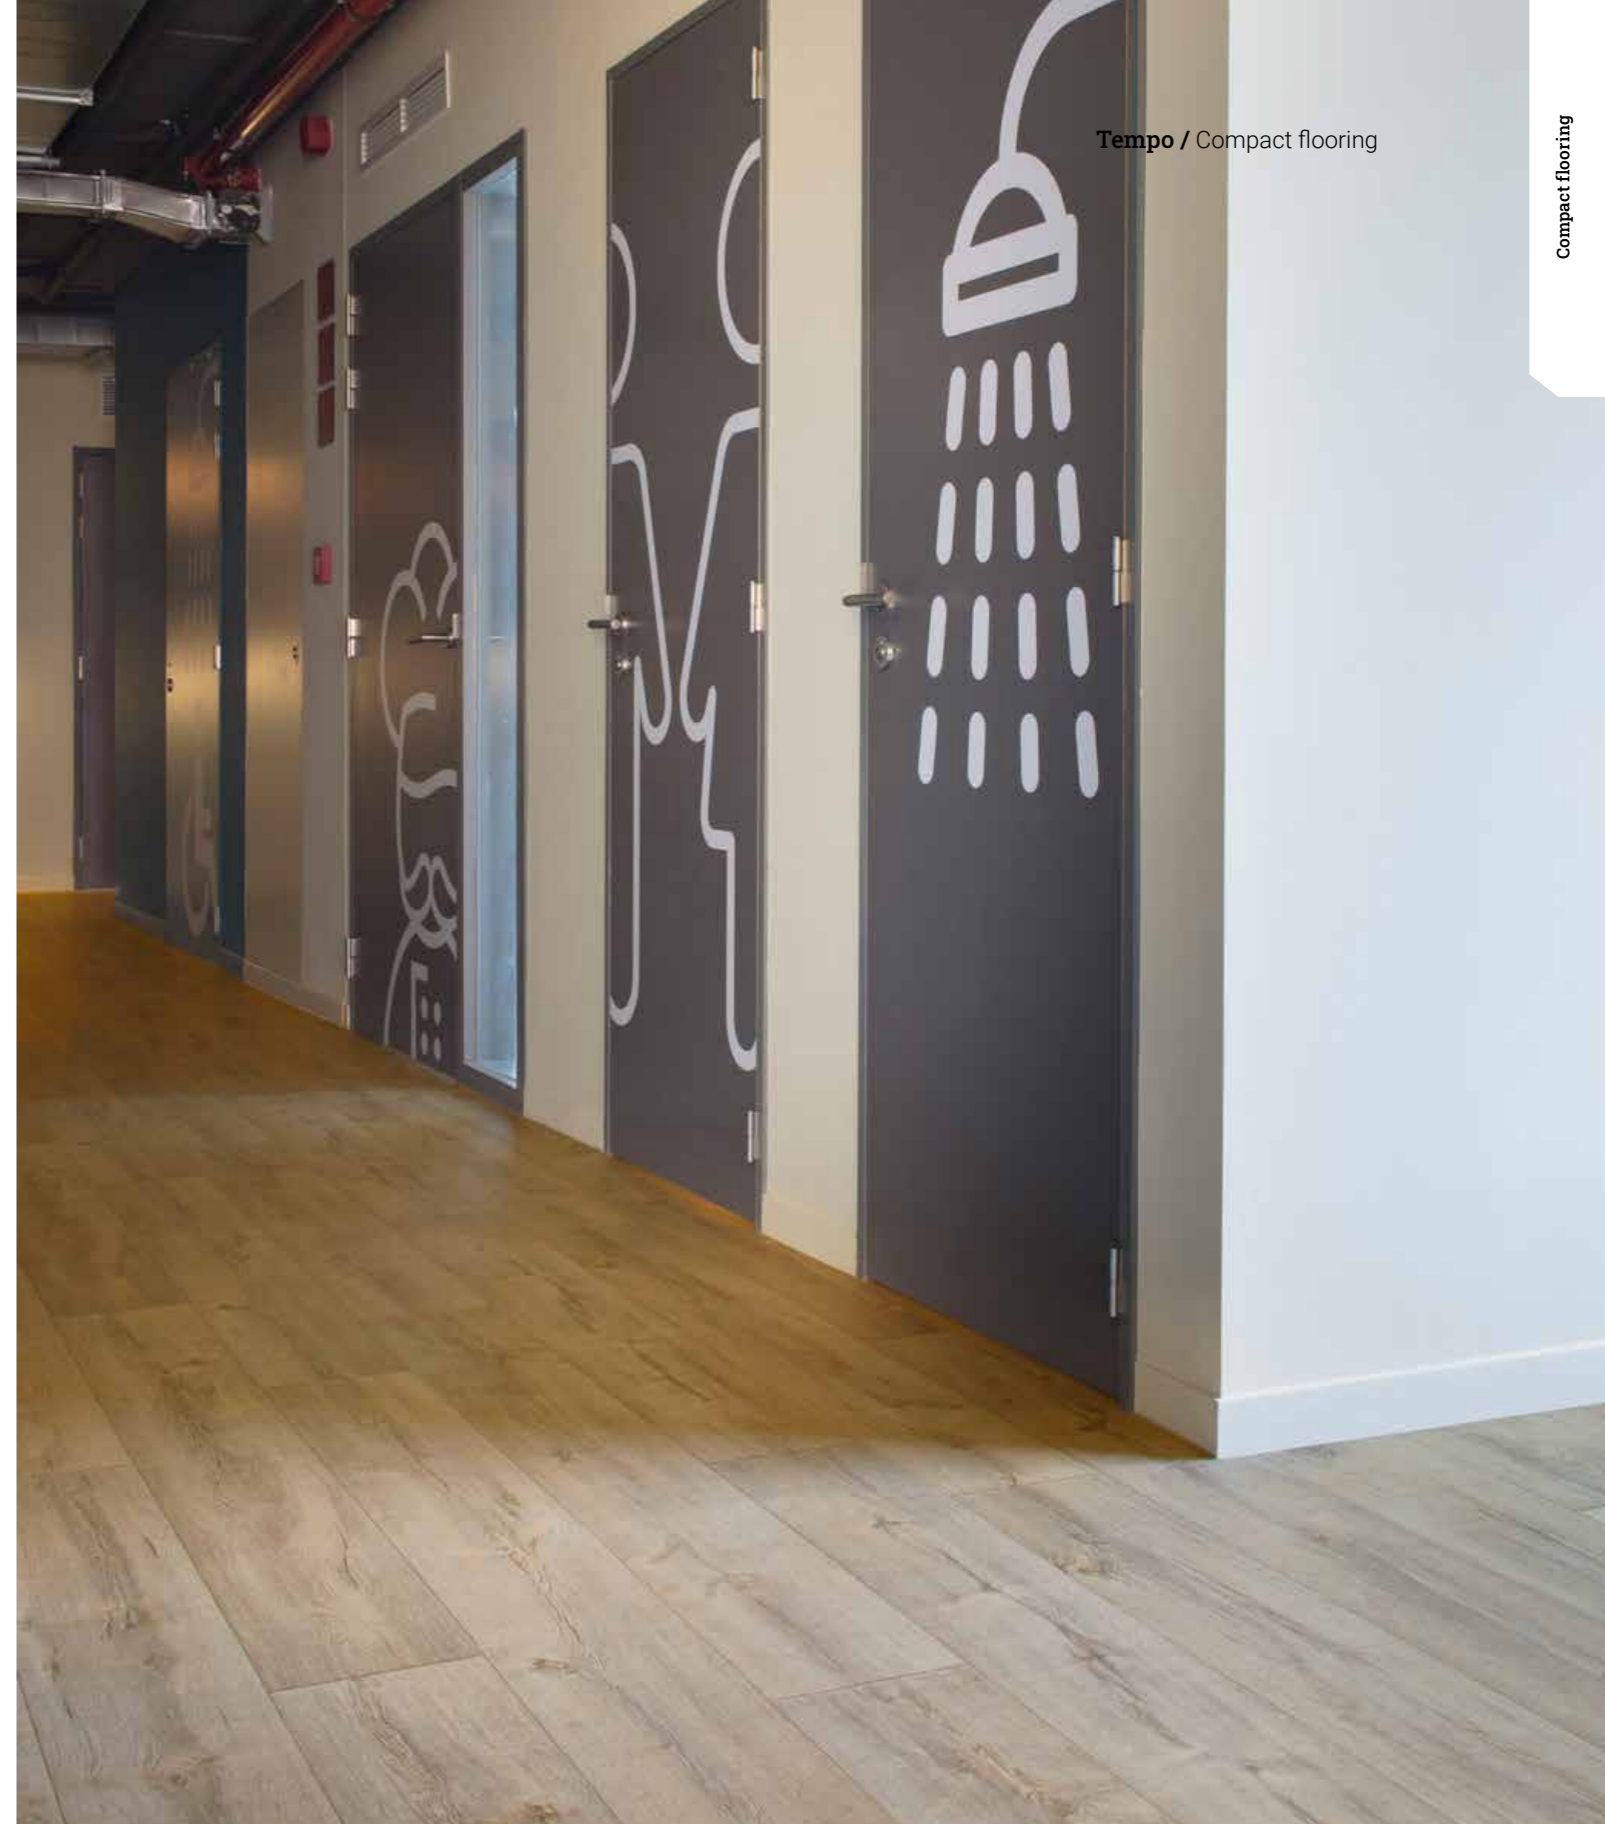

NOBLE OAK W32



Oxley Stone 697
2/4 m
PR: 99,5 x 100 cm



Oxley Stone 692
2/4 m
PR: 99,5 x 100 cm



Oxley Stone 695
2/4 m
PR: 99,5 x 100 cm



OXLEY STONE 695 / CABRAL OAK W34

PR - Pattern Repeat




Centra 70

Compact flooring

- **Class 34** Commercial very heavy
- **Class 43** Light industrial heavy
- **Wear layer** 0,70 mm
- **Total thickness** 2,00 mm
- **Width** 2 - 3 - 4 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Glued
- **Budget collection**
- **Warranty** 7 years



Sedna T32
LRV 49 - 2/3/4m
PR: 100 x 100 cm




Sedna T75
LRV 17 - 2/3/4m
PR: 100 x 100 cm



Sedna T94
LRV 23 - 2/3/4m
PR: 100 x 100 cm



Sedna T92
LRV 48 - 2/3/4m
PR: 100 x 100 cm

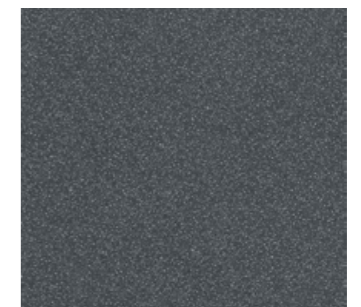

Sedna T99
LRV 13 - 2/3/4m
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



London Stone T30
LRV 37 - 2/3/4 m
PR: 200 x 150 cm




London Stone T93
LRV 38 - 2/3/4 m
PR: 200 x 150 cm



London Stone T95
LRV 37 - 2/3/4 m
PR: 200 x 150 cm



London Stone T94
LRV 22 - 2/3/4 m
PR: 200 x 150 cm



London Stone T96
LRV 10 - 2/3/4 m
PR: 200 x 150 cm



London Stone T68
LRV 21 - 2/3/4 m
PR: 200 x 150 cm



LONDON STONE T68

LRV - Light Reflectance Value / PR - Pattern Repeat




ALLURE T33 / LONDON STONE T30




Sorbonne T97
LRV 19 - 2/3/4 m
PS: 16,7 x 100 cm
PR: 99,5 x 100 cm




Camargue T93
LRV 30 - 2/3/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Camargue T10
LRV 40 - 2/3/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Aspin T49
LRV 21 - 2/3/4 m
PS: 14,4 x 100 cm
PR: 100 x 100 cm




Camargue T52
LRV 30 - 2/3/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm



Camargue T51
LRV 47 - 2/3/4 m
PS: 10 cm x different lengths
PR: 100 x 120 cm



Allure T18
LRV 15 - 2/3/4 m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm



Allure T45
LRV 25 - 2/3/4 m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm



Calais T30
LRV 44 - 2/3/4 m
PS: 20 x 120 cm
PR: 100 x 120 cm



Allure T33
LRV 33 - 2/3/4 m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm



LRV - Light Reflectance Value / PR - Pattern Repeat

Safety flooring. Safety, performance and good looks combined



When a safe surface underfoot is a priority, our safety vinyl flooring is your go-to solution. Its HyperGrip top layer is engineered for permanent, wet and dry slip-resistance, and our Sanitec® treatment adds hygienic benefits, too. Durable and easy to maintain, this compact sheet vinyl comes in a variety of contemporary designs, offering attractive, secure options for high-traffic areas.

ISAFE 70 46

TECHNICAL INFO 98




Safety flooring

Isafe 70

Safety flooring

- **Class 34** Commercial very heavy
- **Class 43** Light industrial heavy
- **Wear layer** 0,70 mm
- **Total thickness** 2,15 mm
- **Width** 2 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Glued
- **Sanitec®**
- **Slip Resistance R12**
- **Warranty** 15 years



COMPACT FLOORING



15 YEARS WARRANTY




R12 - LIFELONG SLIP RESISTANCE



SANITEC®




INTENSE USAGE

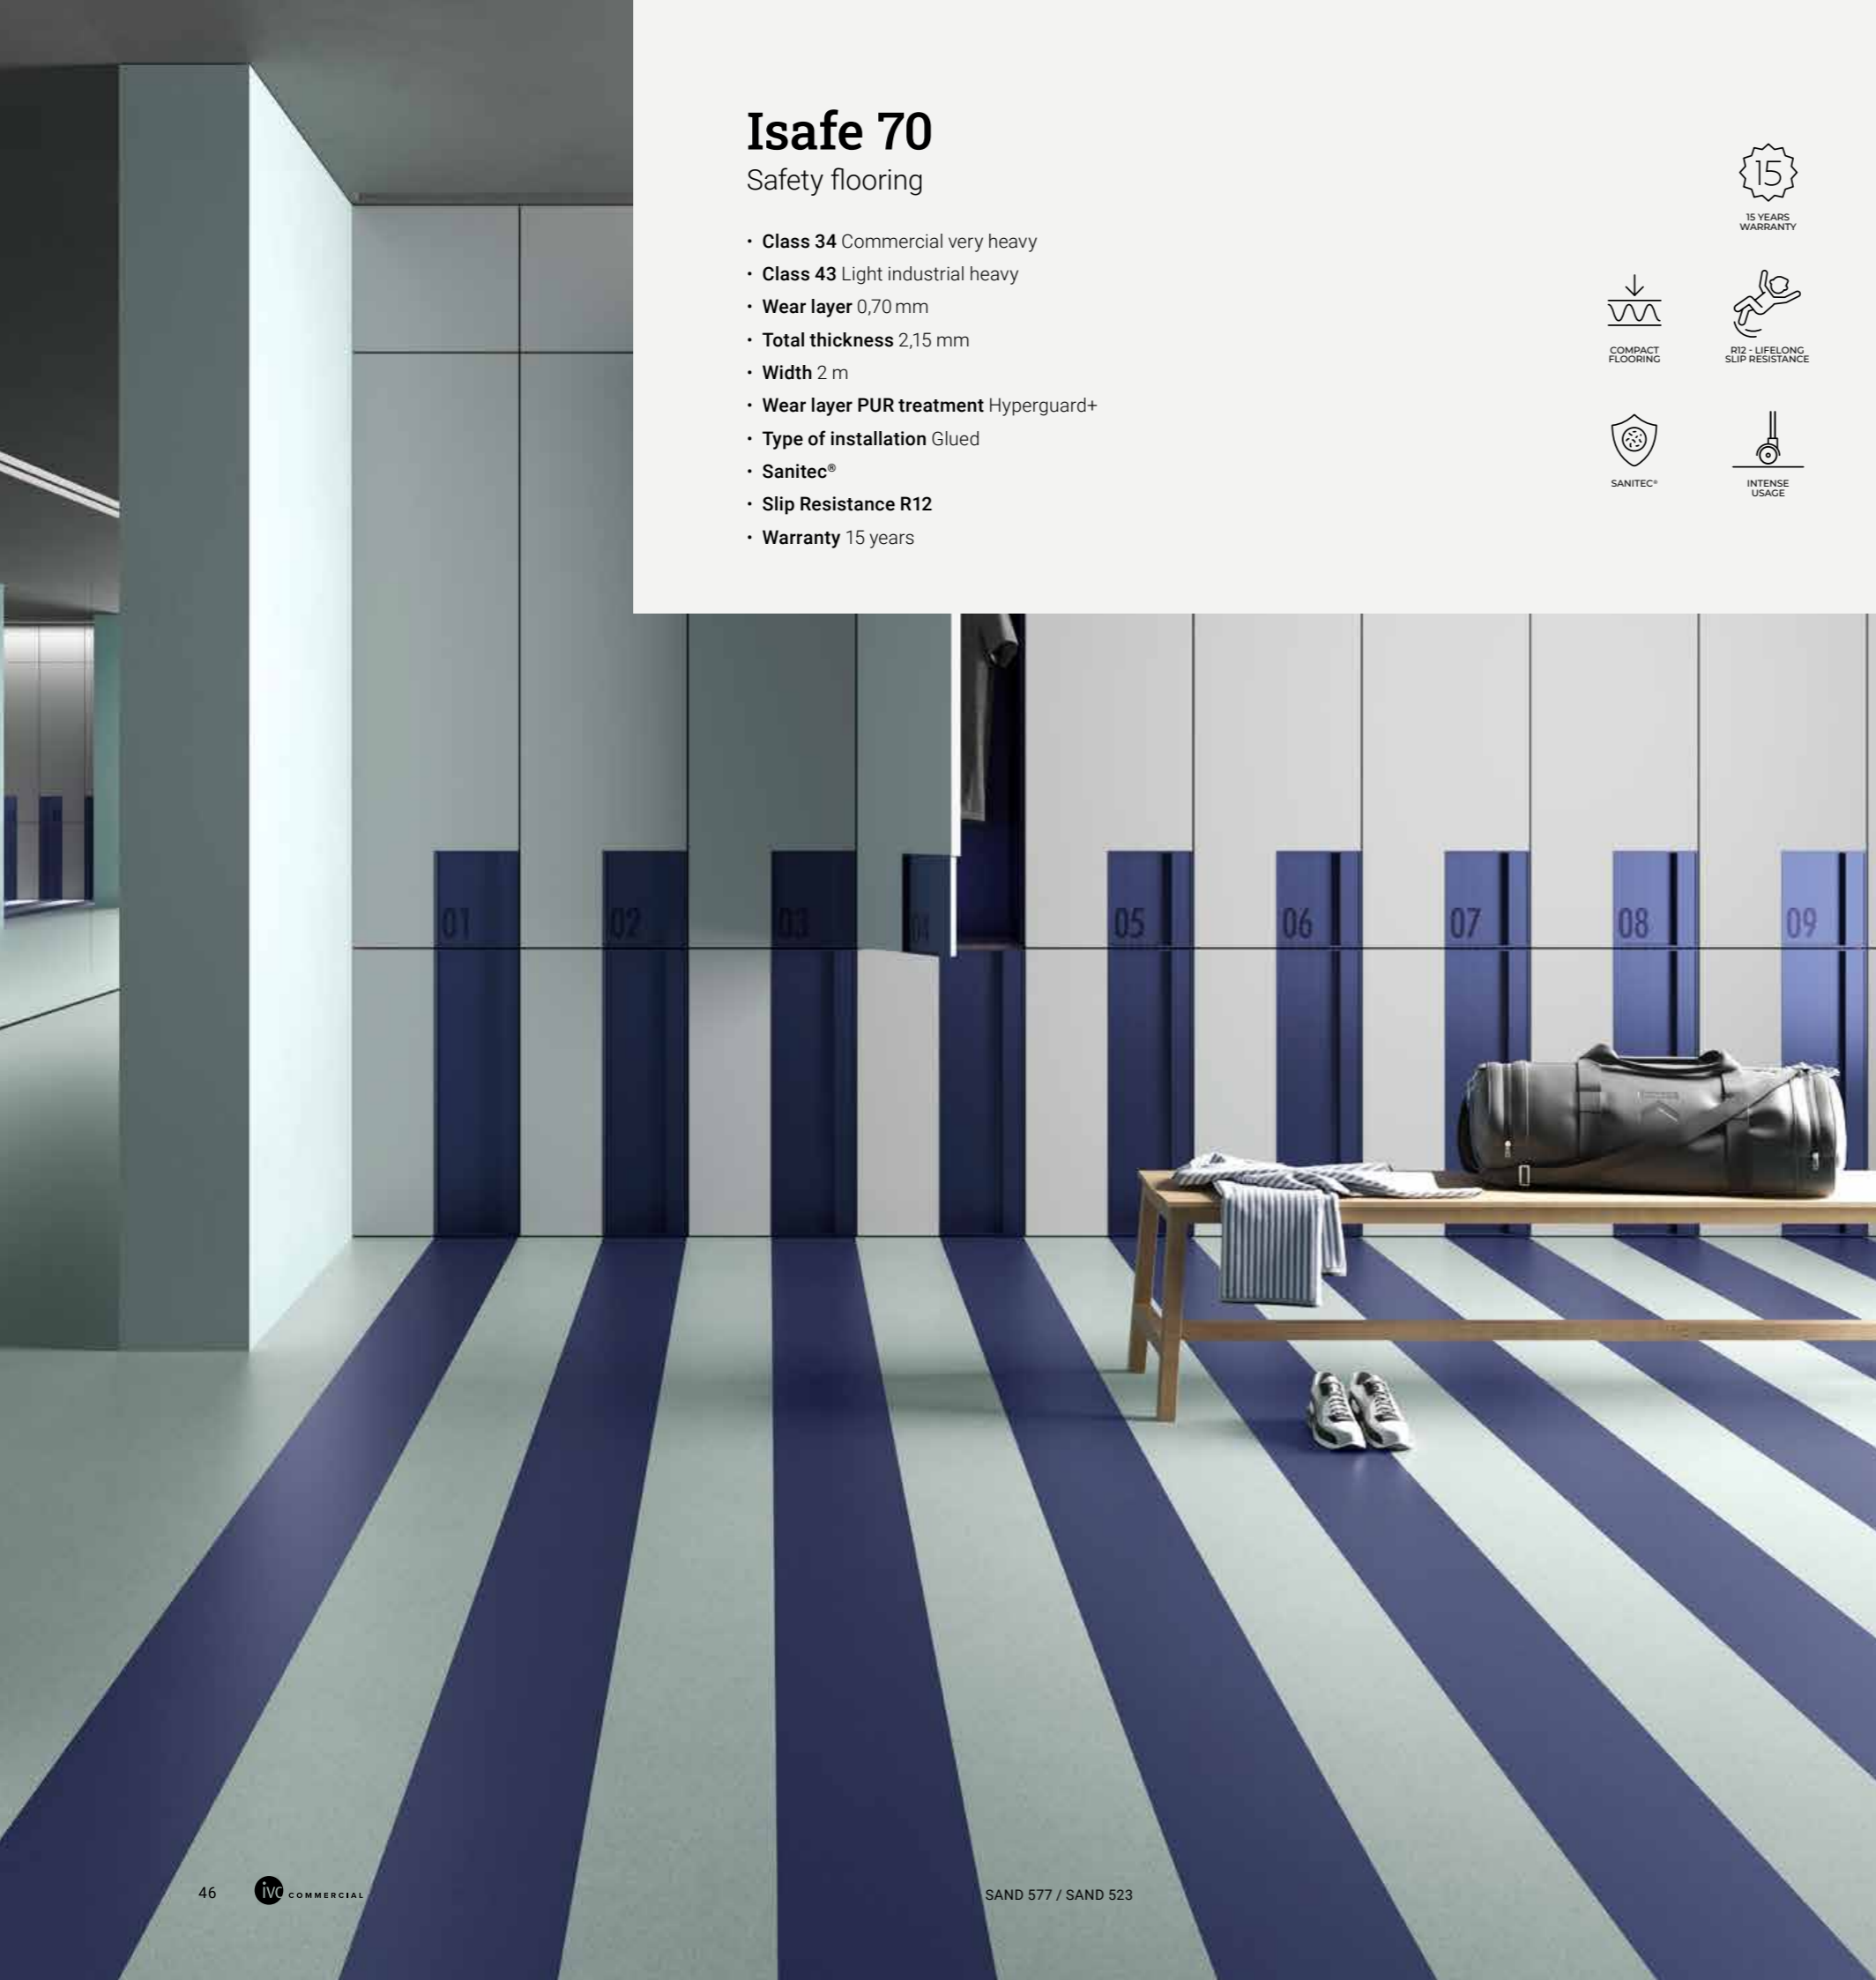

Sand 599
LRV 5 - 2 m
PR: 100 x 100 cm



Sand 597
LRV 16 - 2 m
PR: 100 x 100 cm



Sand 594
LRV 29 - 2 m
PR: 100 x 100 cm



Sand 531
LRV 42 - 2 m
PR: 100 x 100 cm



Sand 577
LRV 6 - 2 m
PR: 100 x 100 cm



Sand 523
LRV 19 - 2 m
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat



CORONET 594 / SAND 597



Padua 593
LRV 20 - 2m
PR: 99,5 x 100 cm



Padua 529
LRV 15 - 2m
PR: 99,5 x 100 cm




Padua 565
LRV 21 - 2m
PR: 99,5 x 100 cm




Padua 579
LRV 16 - 2m
PR: 99,5 x 100 cm




Sting 539
LRV 41 - 2m
PR: 199 x 100 cm



Sting 583
LRV 31 - 2m
PR: 199 x 100 cm




Coronet 594
LRV 57 - 2m
PR: 99,5 x 100 cm



Bolivia 599
LRV 8 - 2m
PR: 0,30 x 33,30 cm




LRV - Light Reflectance Value / PR - Pattern Repeat




Noblesse 589
LRV 10 - 2m
PS: 10 x 100 cm
PR: 100 x 100 cm



Noblesse 593
LRV 30 - 2m
PS: 10 x 100 cm
PR: 100 x 100 cm



Toronto 596
LRV 28 - 2m
PS: 16,7 x 100 cm
PR: 100 x 100 cm




Camargue 558
LRV 30 - 2m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Patagonia 544
LRV 16 - 2m
PS: 11,8 x 47,2 cm
PR: 199 x 100 cm




Patagonia 595
LRV 39 - 2m
PS: 11,8 x 47,2 cm
PR: 199 x 100 cm




Tavel 530
LRV 30 - 2m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Tavel 595
LRV 39 - 2m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Monte Carlo 538
LRV 20 - 2m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm




Monte Carlo 593
LRV 22 - 2m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Safety flooring

MONTE CARLO 532 / STOCKHOLM 595



Monte Carlo 532
LRV 38 - 2m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Stockholm 595
LRV 43 - 2m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm




LRV - Light Reflectance Value / PR - Pattern Repeat

Acoustic flooring.
For quiet, comfortable spaces
to enhance wellbeing



In the hustle and bustle of a high-traffic area, sound reduction is vital. Our glue-down acoustic flooring has a specially developed backing that helps make busy spaces feel quieter and more welcoming. Easy to install and maintain, this functional, attractive flooring is durable, highly impact resistant and provides soft comfort underfoot.

OPTIMISE 70	54
PIONIEER	64
VOYAGER NXT	70
TECHNICAL INFO	98

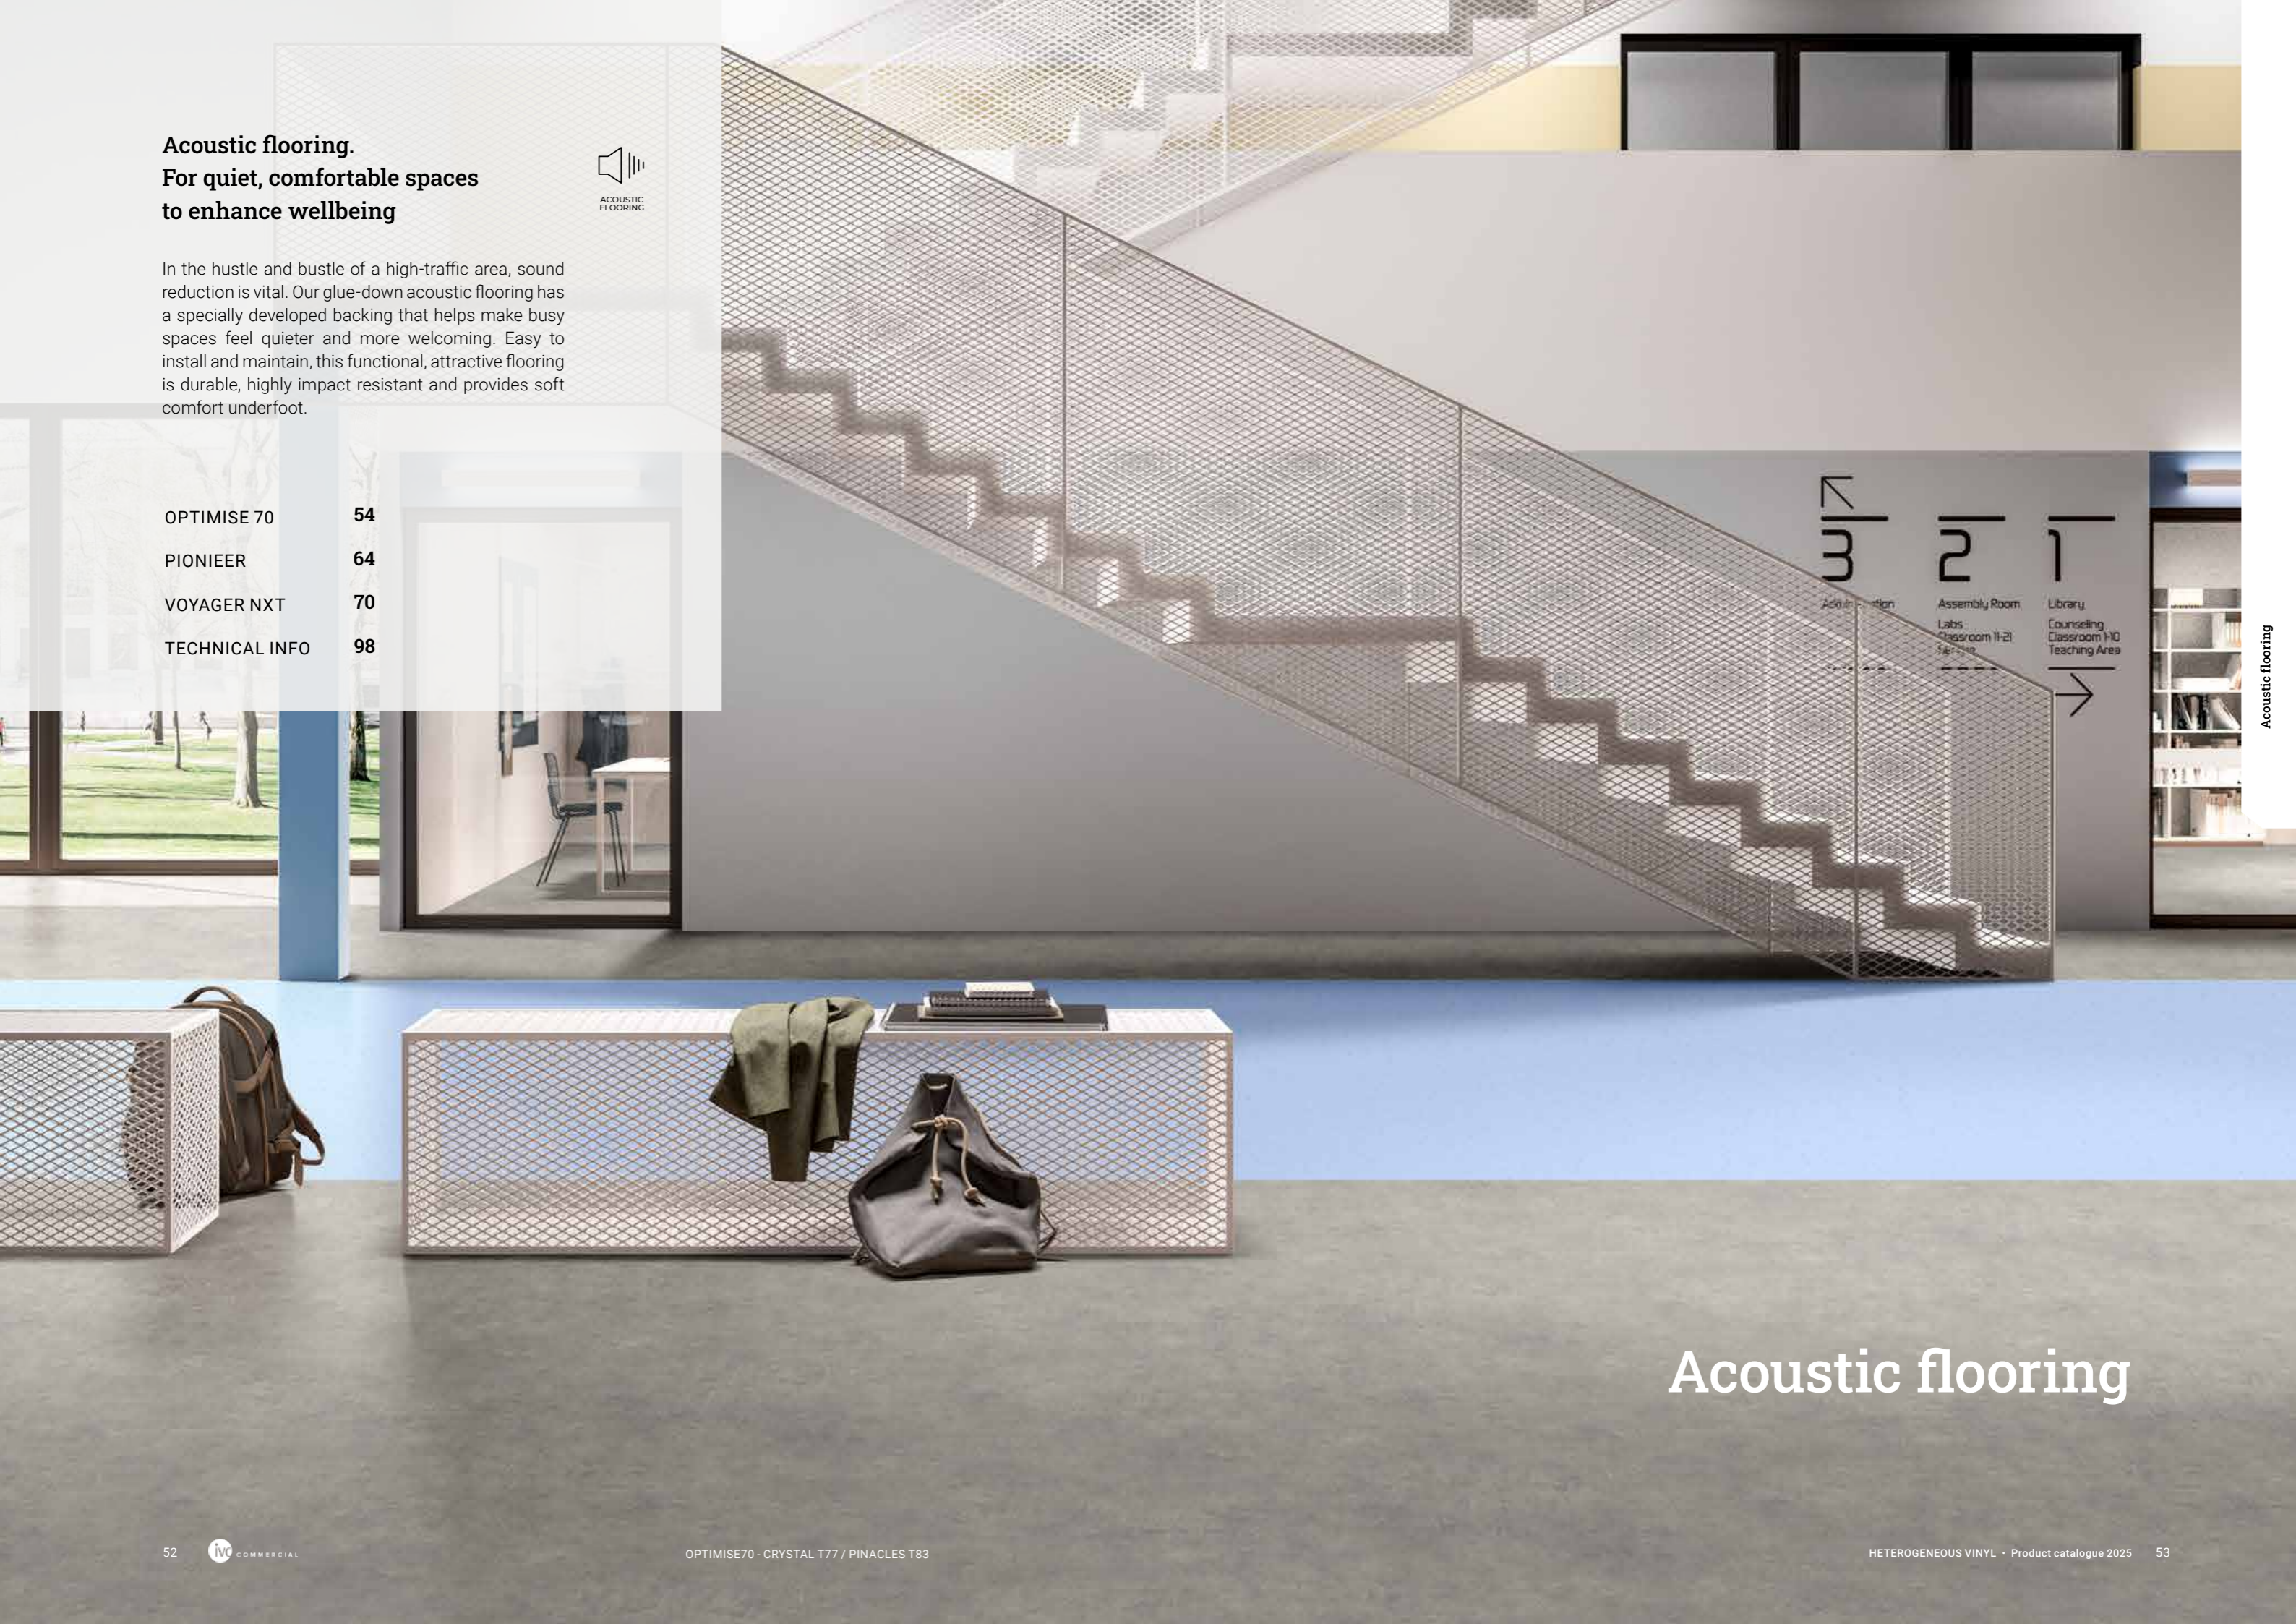

Acoustic flooring

Acoustic flooring

Optimise 70

Acoustic flooring


- **Class 34** Commercial very heavy
- **Class 42** Industrial general
- **Wear layer** 0,70 mm
- **Total thickness** 3,40 mm
- **Width** 2 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Glued
- **19 dB sound reduction**
- **Sanitec®**
- **Warranty** 12 years



Pinnacles T08
LRV 50 - 2 m
PR: 100 x 100 cm




Pinnacles T83
LRV 28 - 2 m
PR: 100 x 100 cm




Pinnacles T91
LRV 38 - 2 m
PR: 100 x 100 cm



Pinnacles T98
LRV 14 - 2 m
PR: 100 x 100 cm



Cevennes T03
LRV 69 - 2 m
PR: 100 x 100 cm

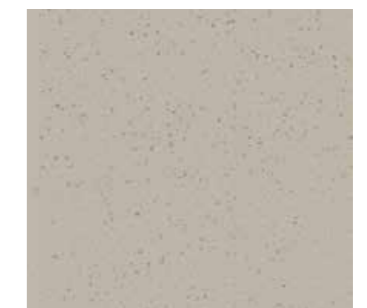

Cevennes T91
LRV 41 - 2 m
PR: 100 x 100 cm



Cevennes T94
LRV 45 - 2 m
PR: 100 x 100 cm



Cevennes T97
LRV 24 - 2 m
PR: 100 x 100 cm




Also available in Iperform 70

LRV - Light Reflectance Value / PR - Pattern Repeat


Acoustic flooring




ROCHUS T66 / TORONTO T93



Crystal T92
LRV 56 - 2 m
PR: 100 x 100 cm



Crystal T94
LRV 45 - 2 m
PR: 100 x 100 cm



Crystal T34
LRV 43 - 2 m
PR: 100 x 100 cm




Crystal T24
LRV 46 - 2 m
PR: 100 x 100 cm




Crystal T77
LRV 28 - 2 m
PR: 100 x 100 cm




Crystal T96
LRV 17 - 2 m
PR: 100 x 100 cm



Rochus T56
LRV 50 - 2 m
PR: 100 x 100 cm



Rochus T93
LRV 49 - 2 m
PR: 100 x 100 cm




Rochus T97
LRV 27 - 2 m
PR: 100 x 100 cm



Rochus T66
LRV 35 - 2 m
PR: 100 x 100 cm



Rochus T76
LRV 21 - 2 m
PR: 100 x 100 cm



Rochus T26
LRV 43 - 2 m
PR: 100 x 100 cm




Acoustic flooring

Also available in Iperform 70

LRV - Light Reflectance Value / PR - Pattern Repeat



Ombra T95
LRV 31 - 2 m
PR: 99,5 x 100 cm



Ombra T97
LRV 16 - 2 m
PR: 99,5 x 100 cm



Ombra T92
LRV 44 - 2 m
PR: 99,5 x 100 cm



Ombra T35
LRV 29 - 2 m
PR: 99,5 x 100 cm




Acoustic flooring

OMBRA T35 / OMBRA T92 / CEVENNES T03


LRV - Light Reflectance Value / PR - Pattern Repeat




Camargue T04
LRV 36 - 2 m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Camargue T83
LRV 24 - 2 m
PS: 10 cm x different lengths
PR: 100 x 120 cm



Camargue T62
LRV 34 - 2 m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Camargue T89
LRV 20 - 2 m
PS: 10 cm x different lengths
PR: 100 x 120 cm




Camargue T33
LRV 26 - 2 m
PS: 10 cm x different lengths
PR: 100 x 120 cm



Toronto T87
LRV 22 - 2 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T81
LRV 29 - 2 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T93
LRV 36 - 2 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Toronto T91
LRV 52 - 2 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat

 Also available in Iperform 70



TORONTO T91 / CEVENNES T97

Acoustic flooring



ELIAS T32



Olympus T33
LRV 36 - 2 m
25 x seamless
PR: 100 x 150 cm



Olympus T91
LRV 33 - 2 m
25 x seamless
PR: 100 x 150 cm



Elias T32
LRV 38 - 2 m
Seamless
PR: 100 x 150 cm



Elias T93
LRV 32 - 2 m
Seamless
PR: 100 x 150 cm



Also available in Iperform 70

LRV - Light Reflectance Value / PR - Pattern Repeat

Pionier


Acoustic flooring

- **Class 34** Commercial very heavy
- **Class 42** Light industrial heavy
- **Wear layer** 0,70 mm
- **Total thickness** 2,50 mm
- **Width** 2 - 4 m
- **Embossing** Inverttech
- **Type of installation** Glued
- **Wear layer PUR treatment** PUR shield
- **18 dB sound reduction**
- **Warranty** 15 years




NEW COLLECTION

Pionier / Acoustic flooring




Beskidy Oak S34
LRV 37 - 2/4 m
PS: 20 x 100 cm
PR: 100 x 100 cm

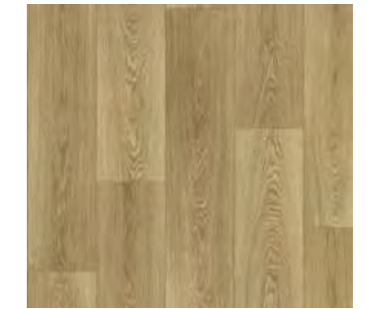


Beskidy Oak S50
LRV 32 - 2/4 m
PS: 20 x 100 cm
PR: 100 x 100 cm




Beskidy Oak S91
LRV 30 - 2/4 m
PS: 20 x 100 cm
PR: 100 x 100 cm

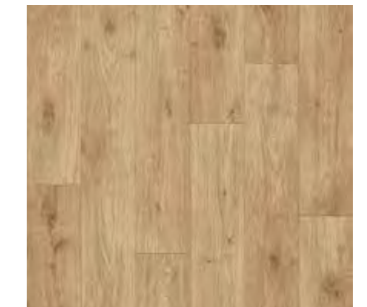


Ohrid Oak S34
LRV 26 - 2/4 m
PS: 17 x 100 cm
PR: 100 x 100 cm



Ohrid Oak S90
LRV 54 - 2/4 m
PS: 17 x 100 cm
PR: 100 x 100 cm

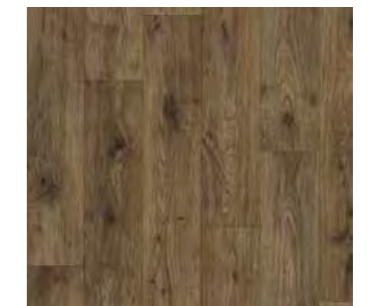

Ohrid Oak S41
LRV 16 - 2/4 m
PS: 17 x 100 cm
PR: 100 x 100 cm



Ohrid Oak S33
LRV 35 - 2/4 m
PS: 17 x 100 cm
PR: 100 x 100 cm



Acoustic flooring

LRV - Light Reflectance Value / PR - Pattern Repeat



Regina S93
LRV 33 - 2/4 m
PR: 100 x 100 cm



Regina S91
LRV 24 - 2/4 m
PR: 100 x 100 cm



Regina S95
LRV 12 - 2/4 m
PR: 100 x 100 cm



Regina S94
LRV 23 - 2/4 m
PR: 100 x 100 cm



OHRID OAK S34 / REGINA S94

Acoustic flooring

LRV - Light Reflectance Value / PR - Pattern Repeat




Taco S31
LRV 38 - 2/4 m
PR: 100 x 100 cm




Taco S30
LRV 42 - 2/4 m
PR: 100 x 100 cm



Taco S34
LRV 40 - 2/4 m
PR: 100 x 100 cm




Taco S73
LRV 15 - 2/4 m
PR: 100 x 100 cm



Taco S91
LRV 45 - 2/4 m
PR: 100 x 100 cm



Taco S97
LRV 16 - 2/4 m
PR: 100 x 100 cm



Taco S93
LRV 31 - 2/4 m
PR: 100 x 100 cm



TACO S93 / JACKSON S44


Pionier / Acoustic flooring




Jackson S52
LRV 30 - 2/4 m
PS: 14,38 x 100 cm
PR: 100 x 100 cm



Jackson S38
LRV 32 - 2/4 m
PS: 14,38 x 100 cm
PR: 100 x 100 cm



Jackson S93
LRV 30 - 2/4 m
PS: 14,38 x 100 cm
PR: 100 x 100 cm



Jackson S44
LRV 17 - 2/4 m
PS: 14,38 x 100 cm
PR: 100 x 100 cm



Acoustic flooring

LRV - Light Reflectance Value / PR - Pattern Repeat

Voyager NXT

Acoustic flooring

- **Class 33** Commercial heavy
- **Class 42** Industrial general
- **Wear layer** 0,60 mm
- **Total thickness** 2,20 mm
- **Width** 2 - (3) - 4 m
- **Wear layer PUR treatment** PUR shield
- **16 dB sound reduction**
- **Type of installation** Glued
- **Low residual indentation**
- **Warranty** 10 years



INVERTECH



PUR SHIELD



EASY CLEAN




FIRM FEELING

NEW COLLECTION

Voyager NXT / Acoustic flooring




Legend Oak M34
LRV 25 - 2/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm

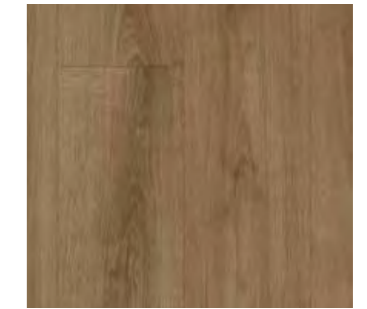


Legend Oak M44
LRV 12 - 2/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm




Legend Oak M97
LRV 25 - 2/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm

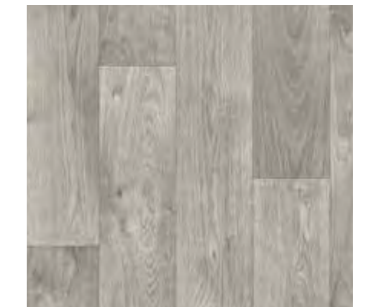

Lirac M90
LRV 33 - 2/3/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Lirac M43
LRV 36 - 2/3/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm

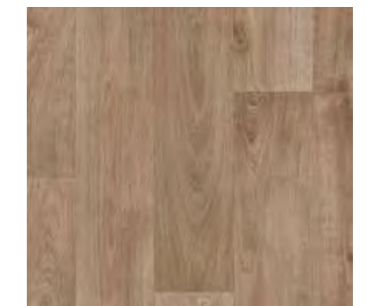


Lirac M48
LRV 17 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm




Acoustic flooring






Basin M95
LRV 29 - 2/3/4 m
PR: 100 x 100 cm



Basin M92
LRV 40 - 2/3/4 m
PR: 100 x 100 cm



Basin M38
LRV 45 - 2/3/4 m
PR: 100 x 100 cm




Basin M82
LRV 29 - 2/4 m
PR: 100 x 100 cm




Basin M75
LRV 19 - 2/4 m
PR: 100 x 100 cm



Basin M25
LRV 26 - 2/4 m
PR: 100 x 100 cm



Basin M55
LRV 43 - 2/4 m
PR: 100 x 100 cm



Basin M94
LRV 16 - 2/4 m
PR: 100 x 100 cm



Basin M05
LRV 61 - 2/4 m
PR: 100 x 100 cm



Bitumin M91
LRV 33 - 2/4 m
PR: 100 x 100 cm




Prato M96
LRV 18 - 2/3/4 m
PR: 100 x 100 cm



Prato M91
LRV 23 - 2/4 m
PR: 100 x 100 cm

LRV - Light Reflectance Value / PR - Pattern Repeat

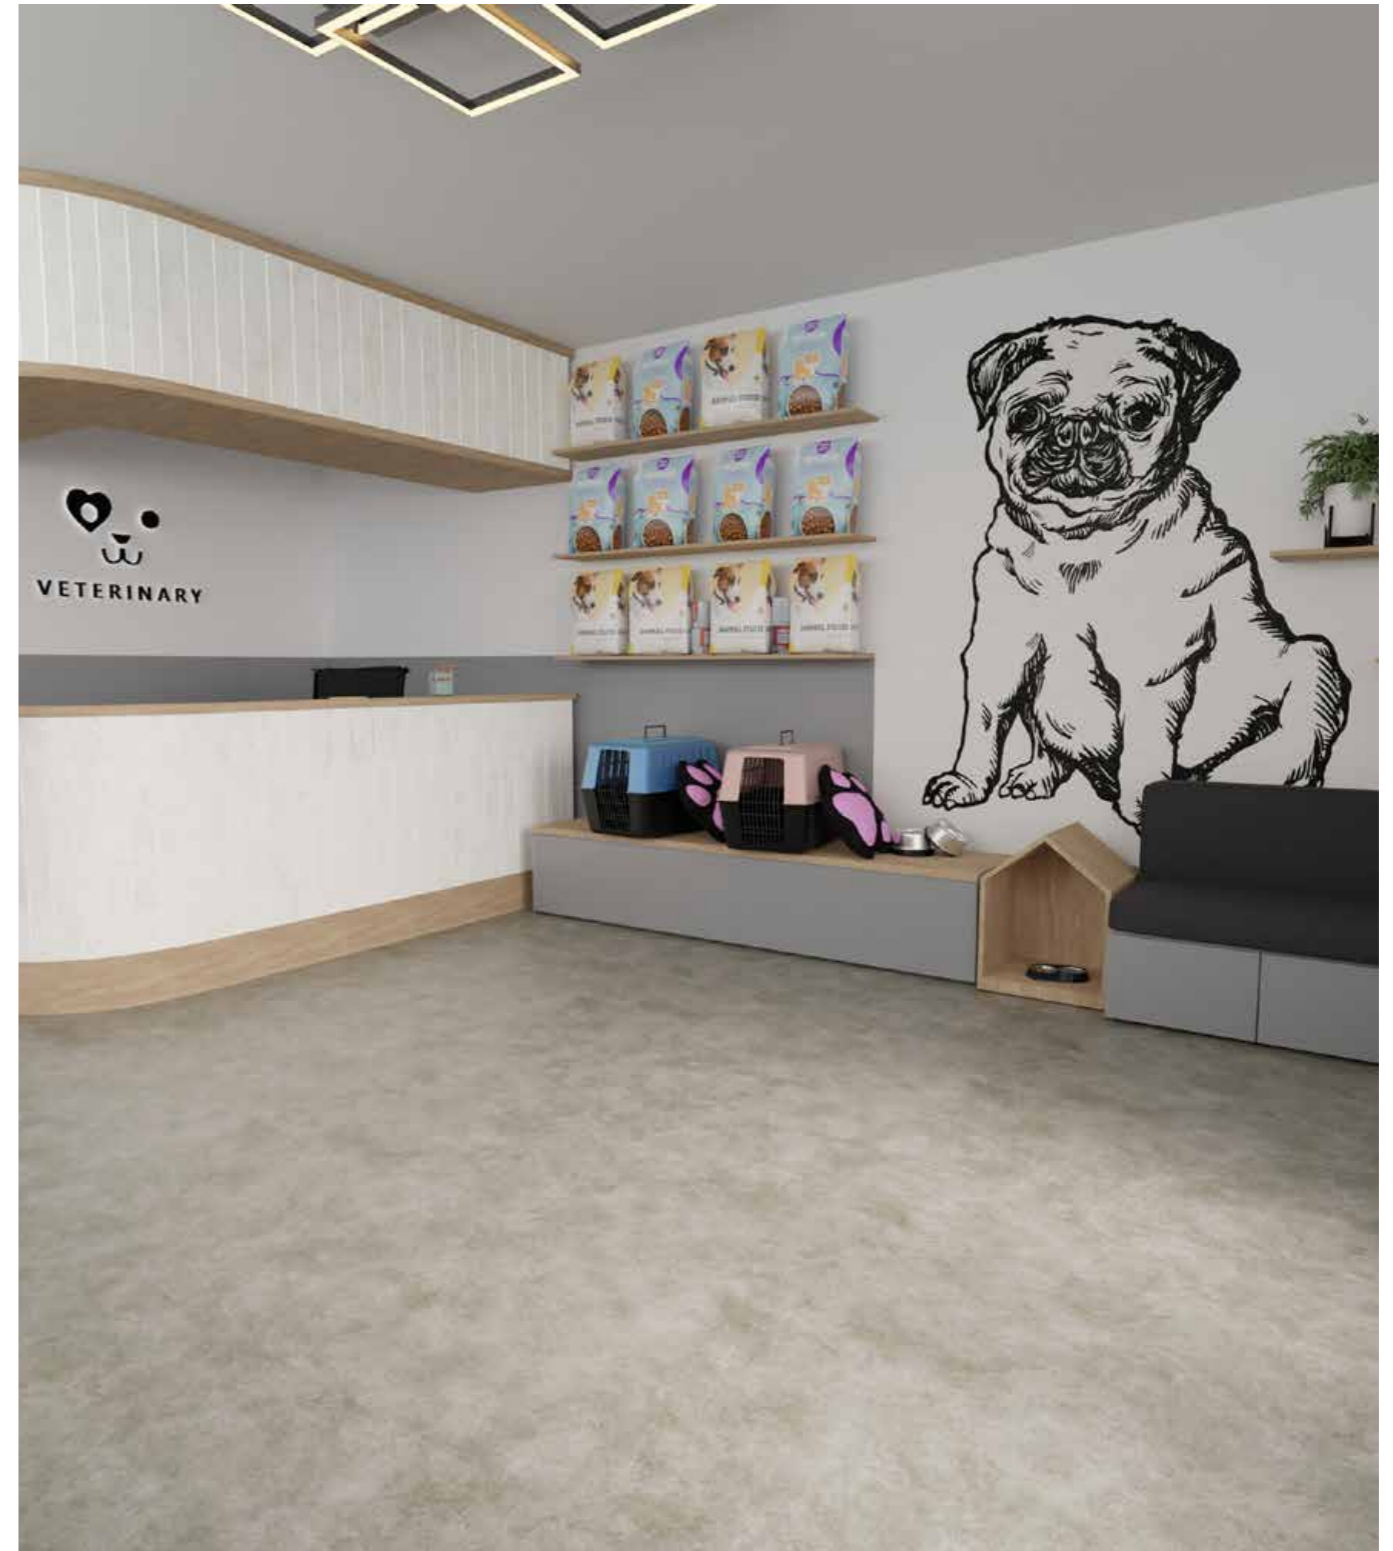

PRATO M91

Acoustic flooring

**Acoustic flooring:
semi-loose lay / loose lay.
Quick installation and
superior noise reduction**

When minimising noise is a priority, our versatile acoustic flooring solutions are ideal for busy spaces, enhancing tranquility and supporting wellbeing. With our loose-lay and semi-loose-lay floors, installation is quick and efficient, and maintenance is easy. These multi-purpose floors combine high performance with stylish designs and they are fully recyclable too.



ACOUSTIC
FLOORING




SEMI-LOOSE LAY



LOOSE LAY

SILENTO 55	76
NOMAD	82
TECHNICAL INFO	98

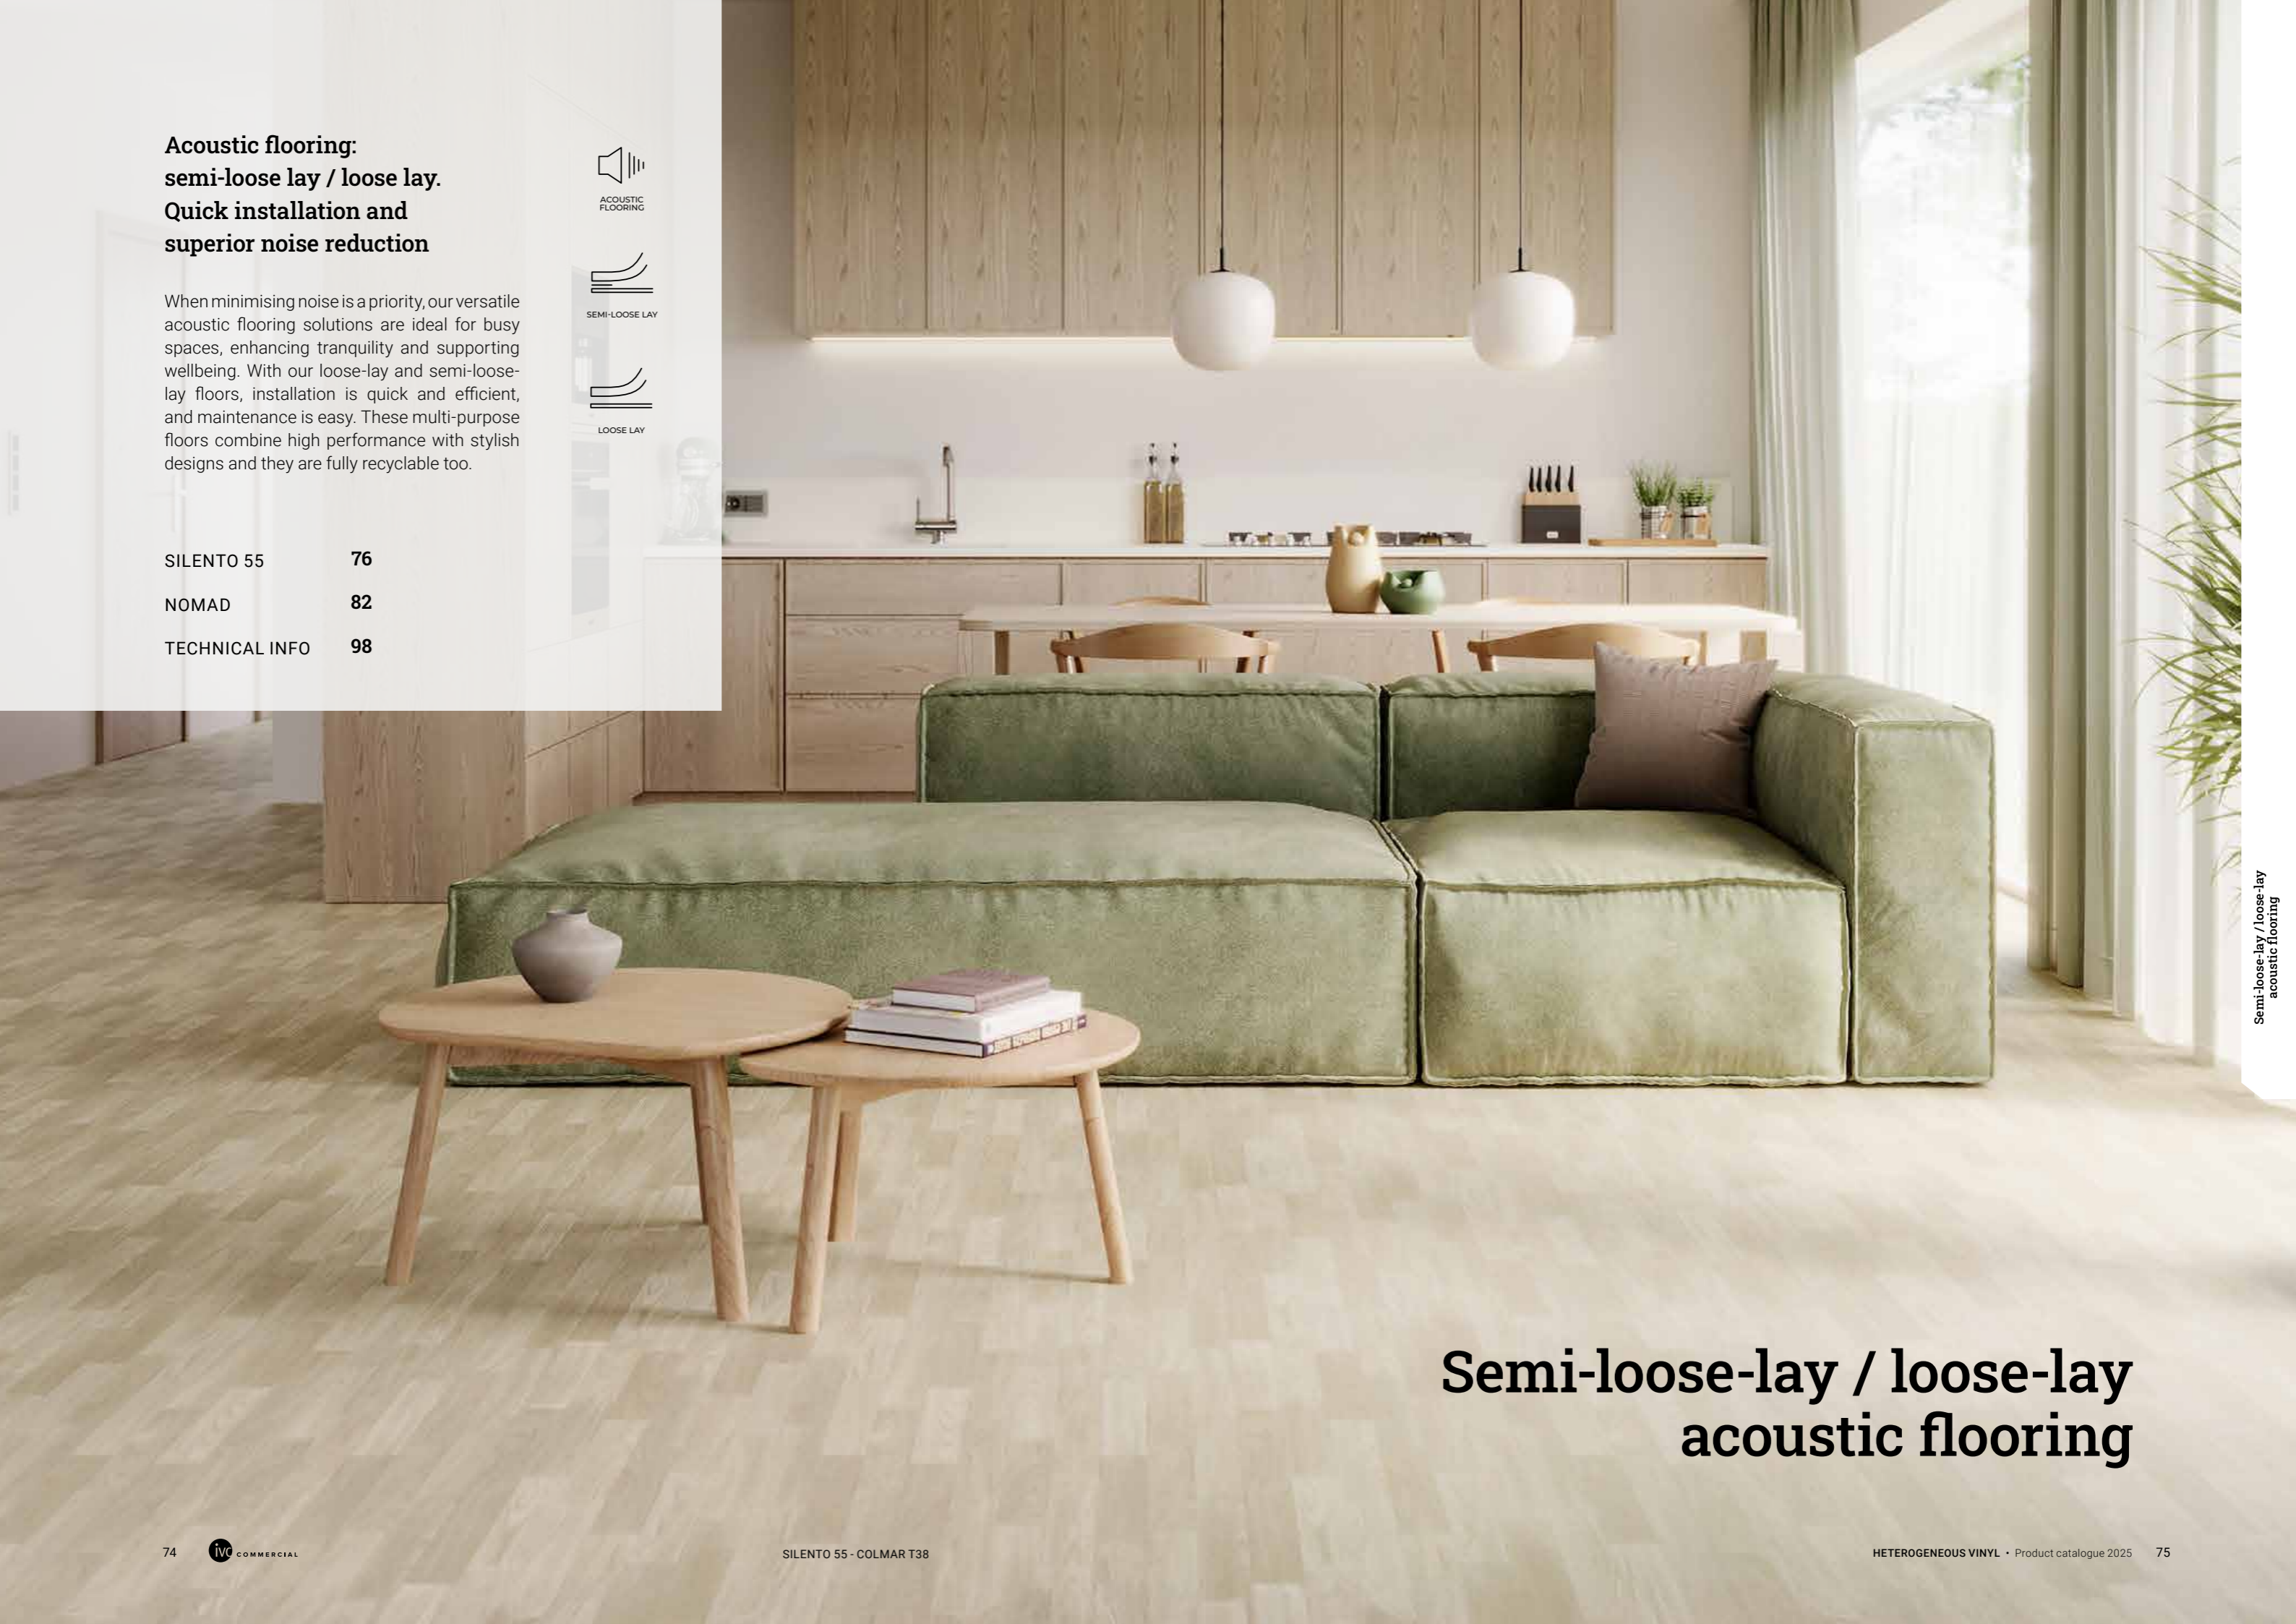


**Semi-loose-lay / loose-lay
acoustic flooring**

Silento 55


Semi-loose-lay acoustic flooring

- **Class 33** Commercial heavy
- **Class 42** Light industrial heavy
- **Wear layer** 0,55 mm
- **Total thickness** 3,20 mm
- **Width** 2 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Semi-loose lay / Glued
- **20 dB sound reduction**
- **Warranty** 12 years




Recover
UNILIN TAKE BACK PROGRAM

Silento 55 / Semi-loose-lay acoustic flooring




Burned Wood T37
LRV 15 - 2 m
PS: 20 x 120 cm
PR: 99,5 x 120 cm

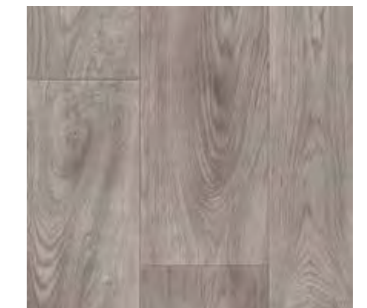


Burned Wood T94
LRV 28 - 2 m
PS: 20 x 120 cm
PR: 99,5 x 120 cm




Tavel T19
LRV 58 - 2 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm

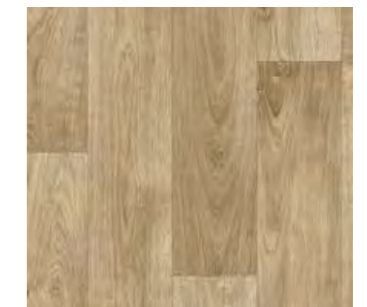

Tavel T14
LRV 30 - 2 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Tavel T17
LRV 35 - 2 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm

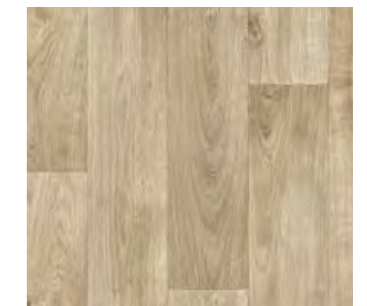

Tavel T18
LRV 35 - 2 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Elias T94
LRV 35 - 2/4 m
Seamless
PR: 100 x 150 cm




Elias T32
LRV 35 - 2/4 m
Seamless
PR: 100 x 150 cm



Also available in Optimise 70

LRV - Light Reflectance Value / PR - Pattern Repeat

Semi-loose-lay / loose-lay
acoustic flooring

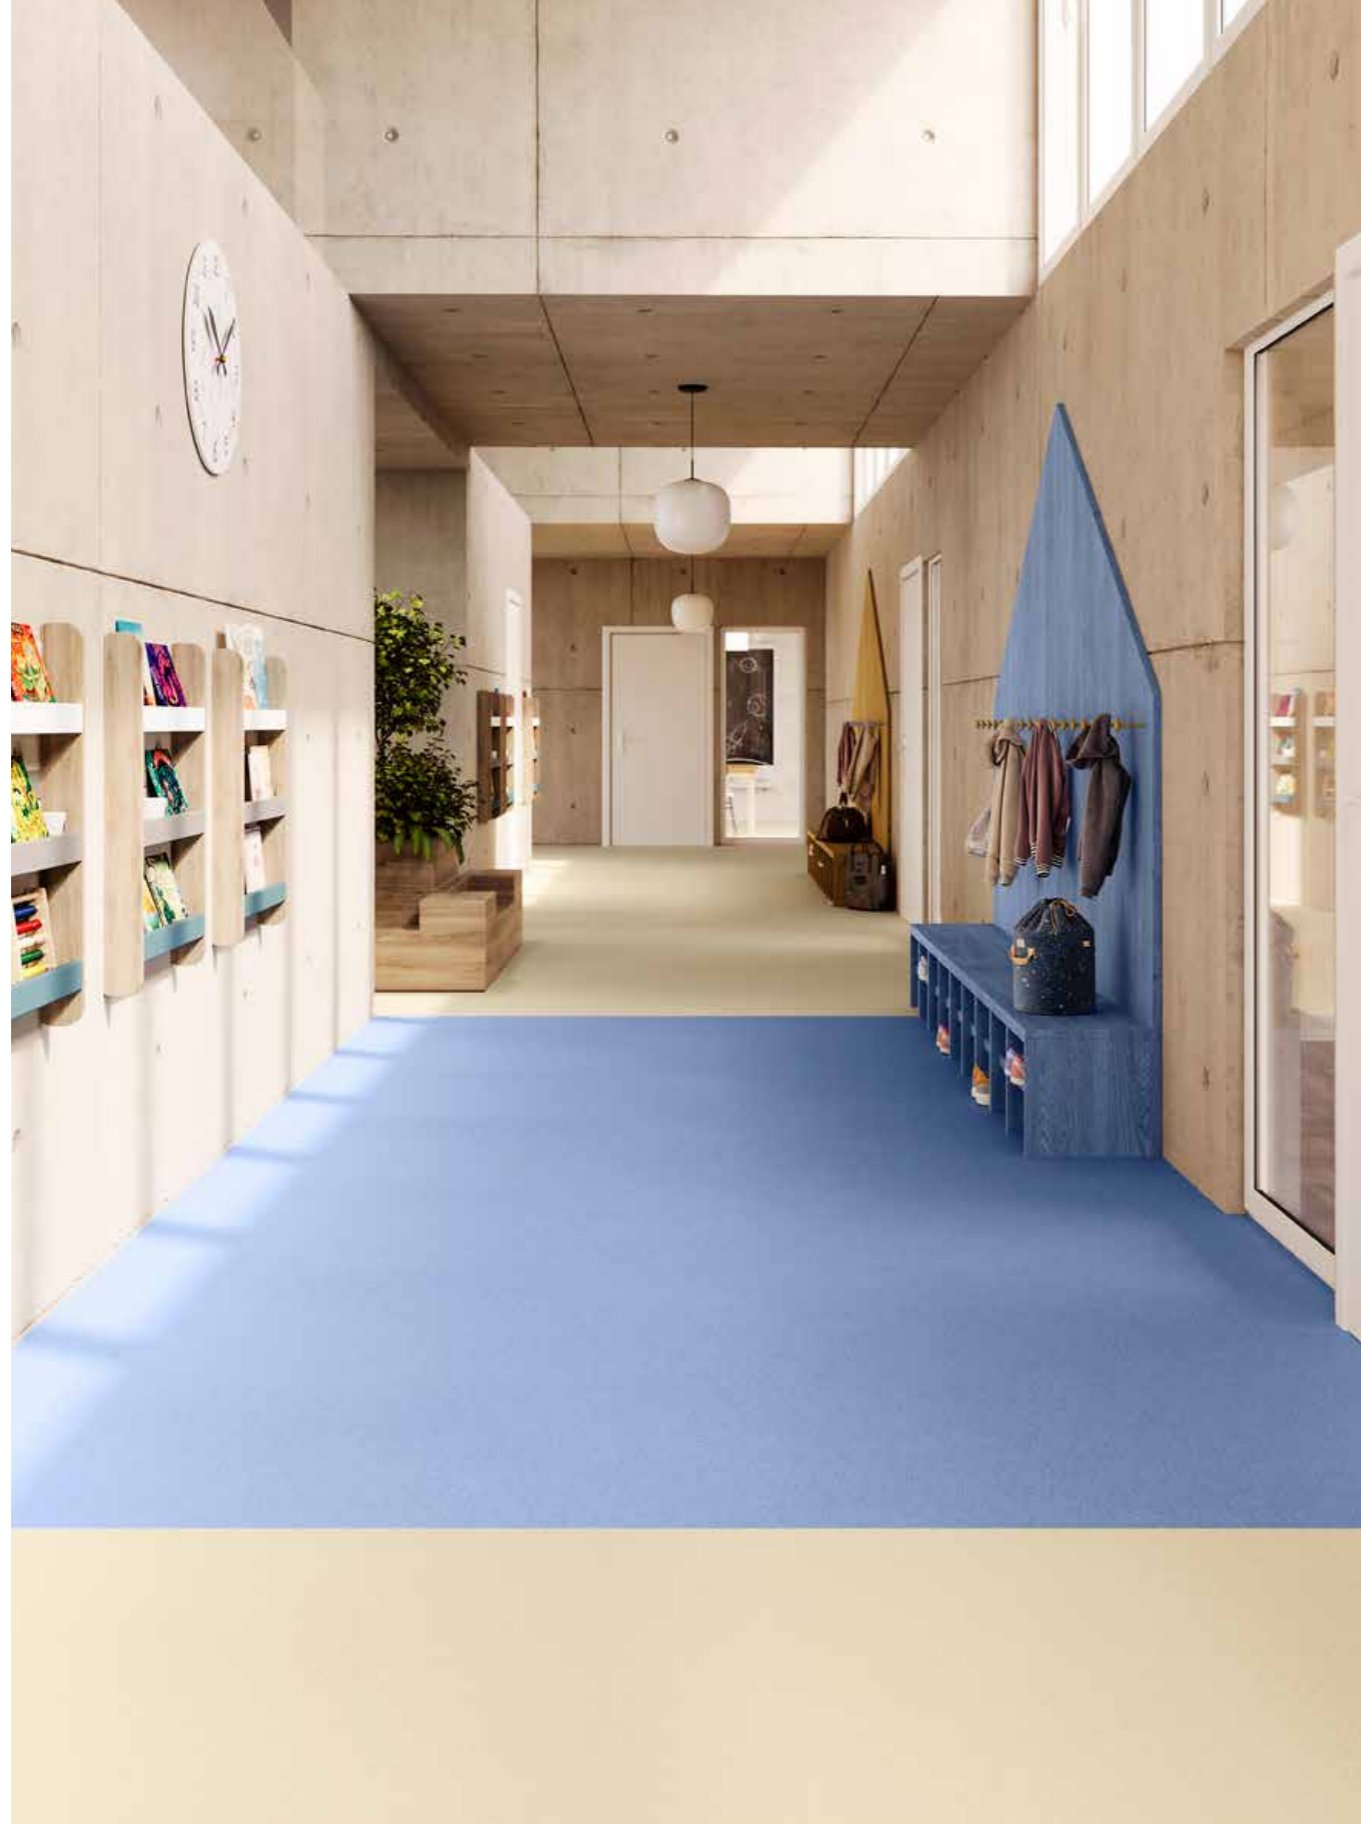


CRYSTAL T35 / CRYSTAL T78



Styx T35
LRV 51 - 2 m
PR: 199 x 100 cm



Styx T39
LRV 45 - 2 m
PR: 199 x 100 cm

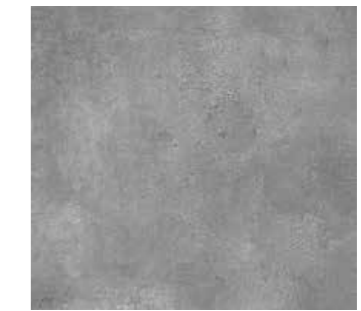


Styx T98
LRV 29 - 2 m
PR: 199 x 100 cm



Cosmos T91
LRV 29 - 2 m
PR: 100 x 100 cm




Cosmos T95
LRV 17 - 2 m
PR: 100 x 100 cm

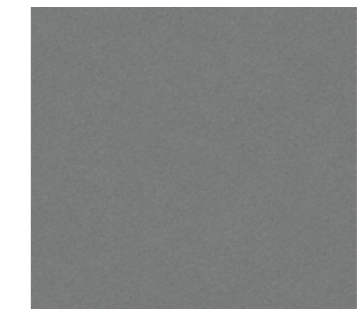

Crystal T98
LRV 20 - 2 m
PR: 100 x 100 cm



Crystal T18
LRV 30 - 2 m
PR: 100 x 100 cm



Crystal T16
LRV 43 - 2 m
PR: 100 x 100 cm



Crystal T28
LRV 45 - 2 m
PR: 100 x 100 cm




Crystal T78
LRV 32 - 2 m
PR: 100 x 100 cm



Crystal T35
LRV 50 - 2 m
PR: 100 x 100 cm







Colmar T65
LRV 29 - 2 m
PS: 6,25 x 33,3 cm
PR: 100 x 100 cm



Colmar T49
LRV 31 - 2 m
PS: 6,25 x 33,3 cm
PR: 100 x 100 cm



Colmar T38
LRV 47 - 2 m
PS: 6,25 x 33,3 cm
PR: 100 x 100 cm




Heracles T36
LRV 34 - 2 m
PS: 25 cm x seamless
PR: 100 x 150 cm




Stockholm T37
LRV 52 - 2 m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm



Stockholm T95
LRV 39 - 2 m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm

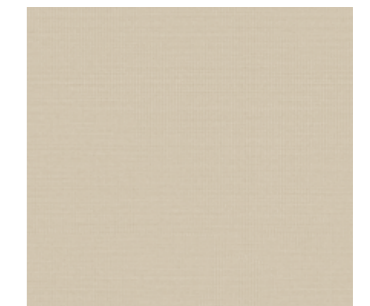

Noralie T34
LRV 48 - 2 m
PR: 99,5 x 100 cm

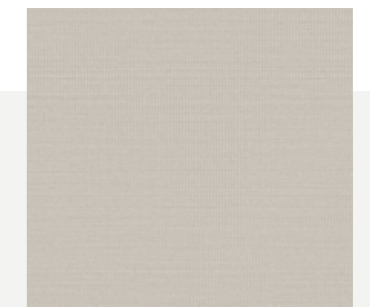

Noralie T94
LRV 47 - 2 m
PR: 99,5 x 100 cm



NORALIE T94

LRV - Light Reflectance Value / PR - Pattern Repeat

Nomad

Loose-lay acoustic flooring

- **Class 23** Domestic heavy
- **Class 32** Commercial heavy
- **Wear layer** 0,45 mm
- **Total thickness** 3,90 mm
- **Width** 2-4 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Loose lay
- **20 dB sound reduction**
- **Warranty** 12 years



Recover
UNILIN TAKE BACK PROGRAM

Nomad / Loose-lay acoustic flooring



Oxley T81
LRV 39 - 2/4 m
PR: 99,5 x 100 cm




Oxley T97
LRV 16 - 2/4 m
PR: 99,5 x 100 cm




London Stone T92
LRV 35 - 2/4 m
PR: 200 x 150 cm




London Stone T97
LRV 23 - 2/4 m
PR: 200 x 150 cm




Tavel T08
LRV 55 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm

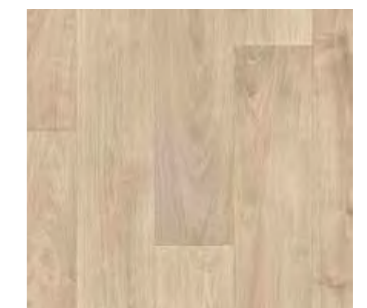

Tavel T45
LRV 33 - 2/4 m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Botticelli T35
LRV 37 - 2/4 m
PS: 12,5 x 60 cm
PR: 100 x 120 cm

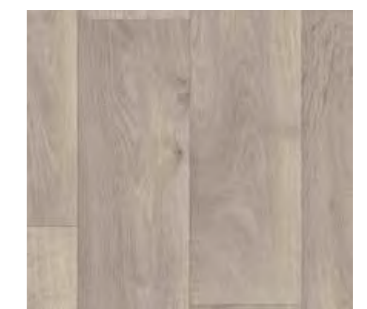

Toronto T66
LRV 32 - 2/4 m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat

Semi-loose-lay / loose-lay
acoustic flooring

**Acoustic flooring:
semi-loose lay with textile backing.
Where luxury meets versatility**

Cut the time and cost of preparation by choosing our textile-backed flooring, which smooths out small imperfections in the subfloor. Ideal for new builds and renovations, it is easy to install and feels comfortable underfoot. What's more, its excellent acoustic properties effectively reduce noise in busy spaces. This versatile flooring is the ultimate solution for all kinds of projects.



ACOUSTIC FLOORING



TEXTILE BACKING



SEMI-LOOSE LAY

LOGITEX ULTIMATE 55	86
NERUTEX	92
TECHNICAL INFO	98



take breaks
relax
and play

**Semi-loose-lay
acoustic textile flooring**

Logitex Ultimate 55

Semi-loose-lay acoustic textile flooring

- **Class 23** Domestic heavy
- **Class 33** Commercial heavy
- **Class 42** Light Industrial General
- **Wear layer** 0,55 mm
- **Total thickness** 3,20 mm
- **Width** 2-4 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Semi-loose lay
- **Covers little subfloor imperfections**
- **Warranty** 12 years



12 YEARS WARRANTY



SEMI-LOOSE LAY



HYPERGUARD+



QUICK INSTALLATION



EASY CLEAN



TILE COVERING SOLUTION

Recover
UNILIN TAKE BACK PROGRAM

Logitex Ultimate 55 / Semi-loose-lay acoustic textile flooring




Elias T32
LRV 36 - 2/4 m
Seamless
PR: 100 x 150 cm



Elias T44
LRV 29 - 2/4 m
Seamless
PR: 100 x 150 cm



Elias T93
LRV 32 - 2/4 m
Seamless
PR: 100 x 150 cm




Elias T47
LRV 32 - 2/4 m
Seamless
PR: 100 x 150 cm




LRV - Light Reflectance Value / PR - Pattern Repeat



Patagonia T34
LRV 37 - 2/4m
PS: 11,8 x 47,2 cm
PR: 199 x 100 cm



Toronto T13
LRV 37 - 2/4m
PS: 16,7 x 100 cm
PR: 100 x 100 cm



Tavel T33
LRV 36 - 2/4m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm



Tavel T81
LRV 41 - 2/4m
PS: 12,5 x 100 cm
PR: 99,5 x 100 cm




Stockholm T37
LRV 49 - 2/4m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm



Stockholm T95
LRV 39 - 2/4m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm



Stockholm T42
LRV 22 - 2/4m
PS: 16,6 x 120 cm
PR: 99,5 x 120 cm

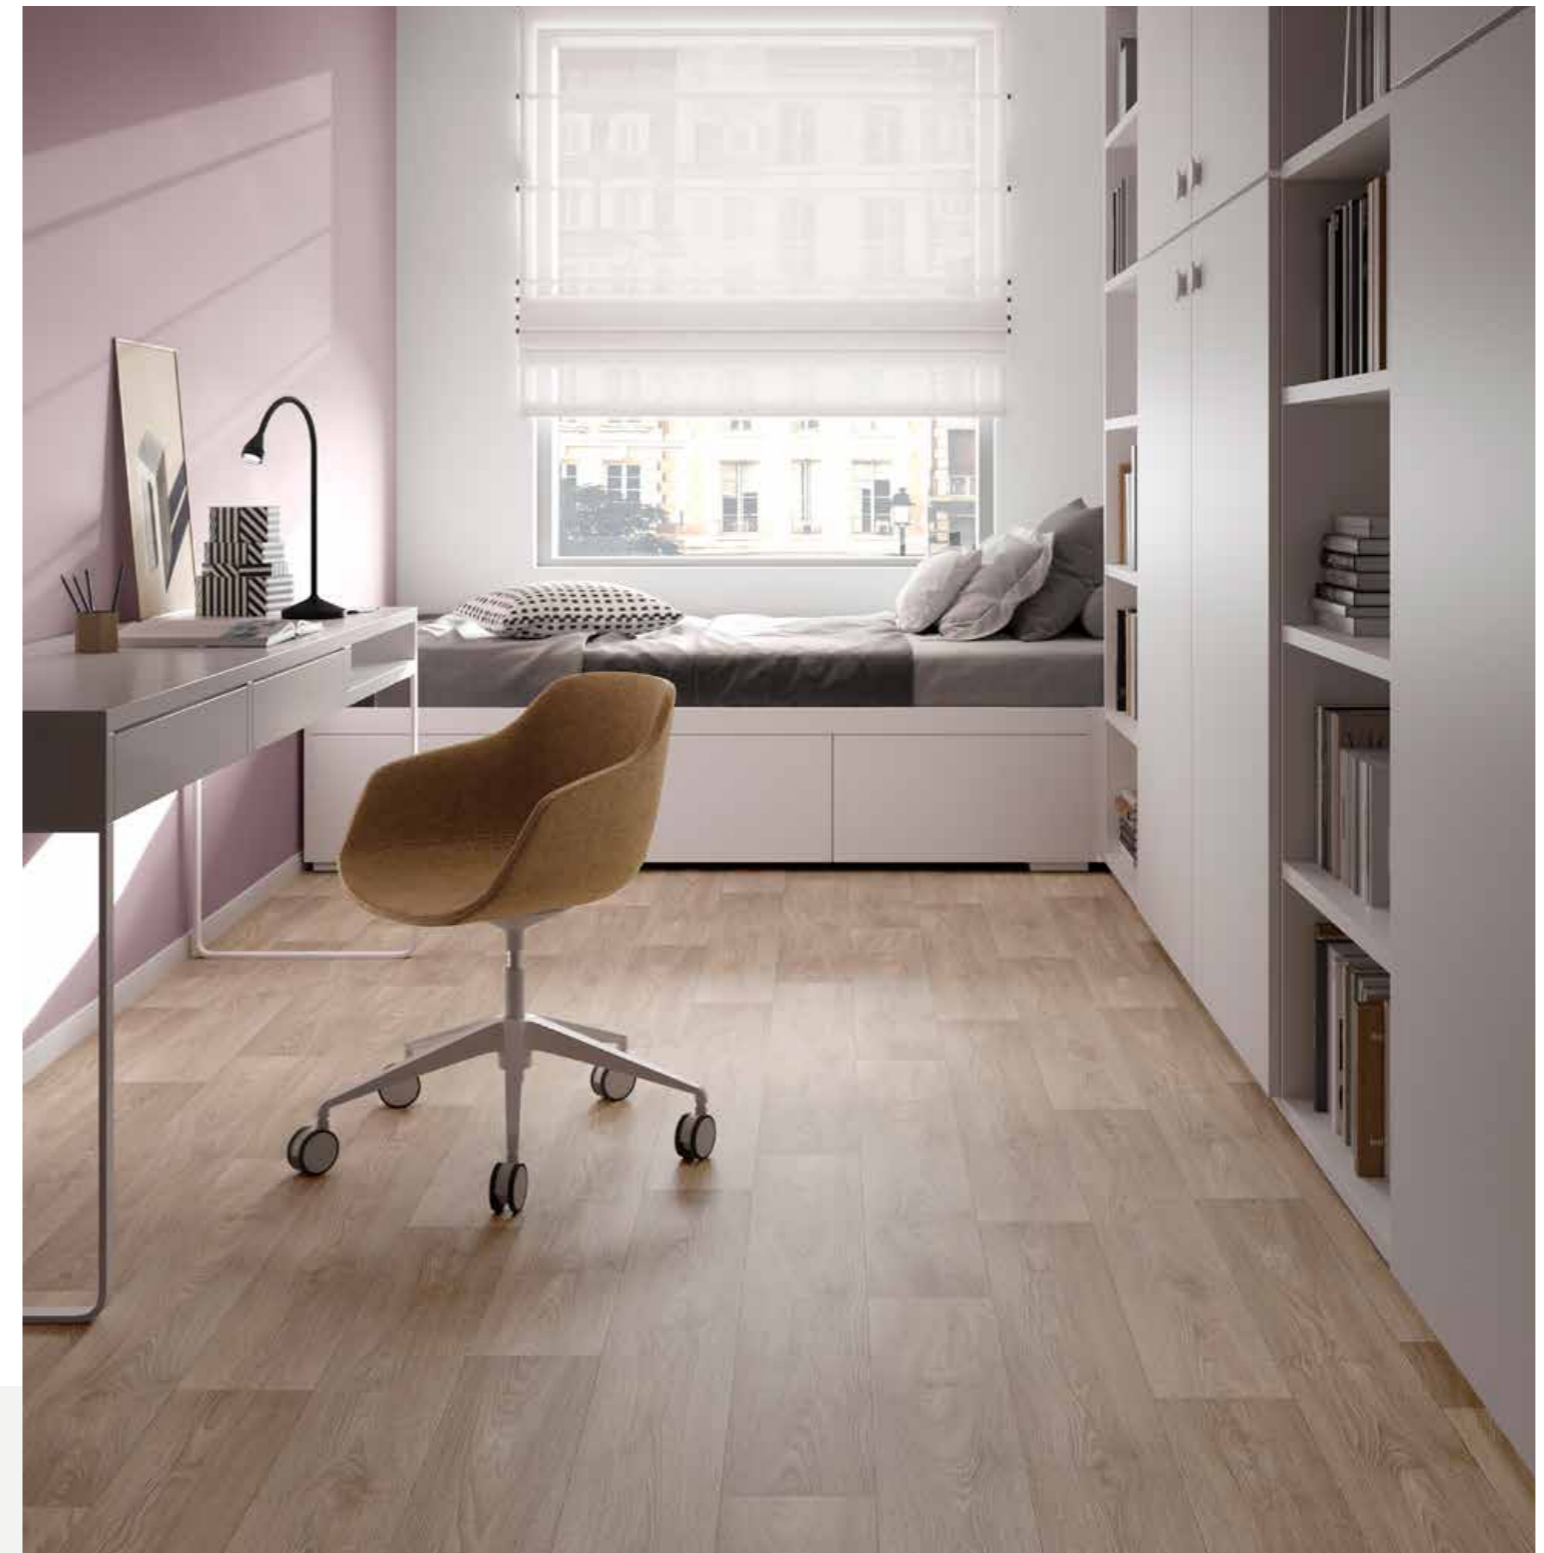


STOCKHOLM T42

Semi-loose-lay
acoustic textile flooring



COSMOS T09 / TAVEL T33

Logitex Ultimate 55 / Semi-loose-lay acoustic textile flooring



Aveiro T76
LRV 47 - 2/4 m
TS: 20 x 20 cm
PR: 99,5 x 100 cm




Evora T93
LRV 51 - 2/4 m
TS: 20 x 20 cm
PR: 99,5 x 100 cm



Gravel T36
LRV 47 - 2/4 m
PR: 100 x 100 cm



Gravel T96
LRV 43 - 2/4 m
PR: 100 x 100 cm



Coronet T35
LRV 55 - 2/4 m
PR: 99,5 x 100 cm



Sting T75
LRV 29 - 2/4 m
PR: 190 x 100 cm



Sting T97
LRV 25 - 2/4 m
PR: 190 x 100 cm



Sting T95
LRV 38 - 2/4 m
PR: 190 x 100 cm



Cosmos T09
LRV 49 - 2/4 m
PR: 100 x 100 cm



Cosmos T91
LRV 22 - 2/4 m
PR: 100 x 100 cm



Sting T15
LRV 21 - 2/4 m
PR: 199 x 100 cm



Also available in Optimise 70

LRV - Light Reflectance Value / PR - Pattern Repeat



Nerutex

Semi-loose-lay acoustic textile flooring

- **Class 23** Domestic heavy
- **Class 33** Commercial heavy
- **Class 42** Light Industrial General
- **Wear layer** 0,55 mm
- **Total thickness** 3,20 mm
- **Width** 2-4 m
- **Wear layer PUR treatment** Hyperguard+
- **Type of installation** Semi-loose lay
- **18 dB sound reduction**
- **Covers little subfloor imperfections**
- **Warranty** 12 years



12 YEARS WARRANTY



HYPERGUARD+



FIRM FEELING



COMFORTABLE UNDERFOOT




BLACK TEXTILE BACKING


Nerutex / Semi-loose-lay acoustic textile flooring



Boreal 548
LRV 14 - 2/4 m
PS: 14 x 70
PR: 100 x 100 cm



Boreal 538
LRV 25 - 2/4 m
PS: 14 x 70
PR: 100 x 100 cm



Boreal 537
LRV 36 - 2/4 m
PS: 14 x 70
PR: 100 x 100 cm



Boreal 545
LRV 21 - 2/4 m
PS: 14 x 70
PR: 100 x 100 cm



LRV - Light Reflectance Value / PR - Pattern Repeat


Nerutex / Semi-loose-lay acoustic textile flooring



Odin T35
LRV 41 - 2/4 m
PR: 99,5 x 100 cm



Odin T39
LRV 31 - 2/4 m
PR: 99,5 x 100 cm



Odin T49
LRV 17 - 2/4 m
PR: 99,5 x 100 cm



Odin T85
LRV 31 - 2/4 m
PR: 99,5 x 100 cm



Sting T94
LRV 20 - 2/4 m
PR: 199 x 100 cm



Sting T31
LRV 52 - 2/4 m
PR: 199 x 100 cm




Sting T34
LRV 38 - 2/4 m
PR: 199 x 100 cm



Sting T91
LRV 28 - 2/4 m
PR: 199 x 100 cm



CORNWALL SLATE T96



Cornwall Slate T09
LRV 40 - 2/4 m
PS: 33,33 x 60
PR: 199 x 120 cm




Cornwall Slate T96
LRV 23 - 2/4 m
PS: 33,33 x 60
PR: 199 x 120 cm




LRV - Light Reflectance Value / PR - Pattern Repeat




SUNDANCE OAK 543



Rhapsody 543
LRV 27 - 2/(3)/4 m
PS: 12,5 cm x different lengths
PR: 99,5 x 120 cm



Rhapsody 565
LRV 21 - 2/(3)/4 m
PS: 12,5 cm x different lengths
PR: 99,5 x 120 cm




Rhapsody 591
LRV 30 - 2/(3)/4 m
PS: 12,5 cm x different lengths
PR: 99,5 x 120 cm




Rhapsody 595
LRV 24 - 2/(3)/4 m
PS: 12,5 cm x different lengths
PR: 99,5 x 120 cm




Sundance Oak 532
LRV 36 - 2/(3)/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm




Sundance Oak 536
LRV 25 - 2/(3)/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm



Sundance Oak 543
LRV 27 - 2/(3)/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm



Sundance Oak 546
LRV 17 - 2/(3)/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm



Sundance Oak 547
LRV 23 - 2/(3)/4 m
PS: 20 x 120 cm
PR: 200 x 120 cm

LRV - Light Reflectance Value / PR - Pattern Repeat

Semi-loose-lay acoustic textile flooring

General and technical information



QUALITY	100
INSTALLATION	102
SEAMLESS DESIGN	110
ENTRANCE MATS	112
ORDER YOUR FREE SAMPLES	113
CASE STUDIES	116
WHAT OUR SYMBOLS MEAN	118
OUR SUSTAINABILITY JOURNEY	120

Quality

Reliability through testing

IVC Flooring ensures top quality by constantly refining testing methods and by using advanced techniques. Our rigorous quality control guarantees durable, high-performance and stylish sheet vinyl flooring. We embrace innovation and challenge the status quo to provide flooring that exceeds customer expectations in both functionality and design.

To explore
the composition
& qualities
of our sheet-vinyl
flooring,
see pages 4-5

Tear test

The force required to tear a vinyl floor. This force is measured in Newtons. The various European or international standards provide for a variety of specific methods.

Delamination test

The delamination test is used to test the adhesion between the various layers. It measures the force required to separate the layers from each other. This may apply to the wear layer, the intermediate layer or the backing.

Indentation test

This test measures the residual indentation and elasticity of the vinyl: the extent to which the vinyl floor recovers its original shape after being exposed to a force of 50kg/cm² for 2.5 hours.

Castor chair test

This procedure determines changes in the appearance and stability of resilient floor coverings when subjected to the movement of a castor chair. The wear is measured and evaluated by testing for 25,000 to 50,000 revolutions.

Dimensional stability and curling

This examines the degree of curling, shrinkage or expansion of vinyl floorings. During this procedure, the product is heated at 80°C for 6 hours, after which it is acclimatised at room temperature.

Thickness

The thickness of the vinyl flooring is measured to verify compliance with European laws.

Wear layer

Microscopy is used to measure the exact thickness of the individual wear layer.

Furniture leg test


Three types of furniture legs are used for this purpose. We mechanically drag the furniture leg over the vinyl with a pressure of 100kg to assess the extent of damage caused to the vinyl coating. This is done in the longitudinal as well as the transverse direction.



BRONX G33 / LIRAC S90

Installation direction

Always follow the installation instructions

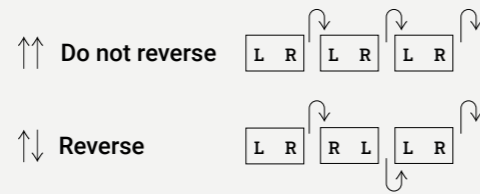

L = Left R = Right

Hot welding

Hot welding is the process of bringing two pieces of sheet-vinyl flooring together using heat and a welding rod. This creates a strong, watertight and hygienic seam. We have a wide range of welding-rod colours, making it easy to match your floor and blend the seams in perfectly. To create an artistic touch or to separate different areas, using contrasting seam colours is another option.

Cold welding

Cold welding is the process of bringing two pieces of sheet-vinyl flooring together using a chemical reaction rather than a heat input. The application of cold-welding liquid via a tube with a needle creates a nearly invisible seam on the flooring.

Loose-lay tape

Loose-lay tape makes it possible to install sheet-vinyl flooring without the use of adhesives or interlocking systems. With this specialised tape, your (semi-) loose-lay heterogeneous vinyl floor is guaranteed to stay securely fitted, while remaining easy to remove and replace. The tape guarantees 100% (semi-) loose-lay vinyl floor installation.

Consult and download our guides

on our website



Installation

To help you implement its high-quality products, IVC Commercial offers you a tailor-made service. For each category of installation type, we provide you with an installation guide containing all the necessary information for proper installation, cleaning and maintenance.

SEMI-LOOSE LAY WITH LOOSE-LAY TAPE



Our welding rods are available in a wide variety of colours to match our floors


SAND T22 / CEVENNES T94

Hot welding


4 mm x 100 m length

Hot welding is the process of bringing two pieces of sheet vinyl flooring together using heat and a welding rod. This creates a strong, watertight and hygienic seam. We have a wide range of welding-rod colours, making it easy to match your floor and blend the seams in perfectly. To create an artistic touch or to separate different areas, using contrasting seam colours is another option.

STEPS

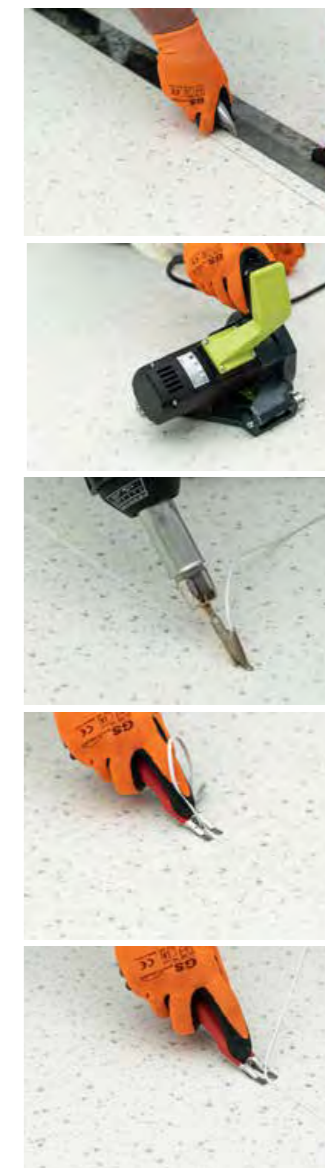

TOOLS

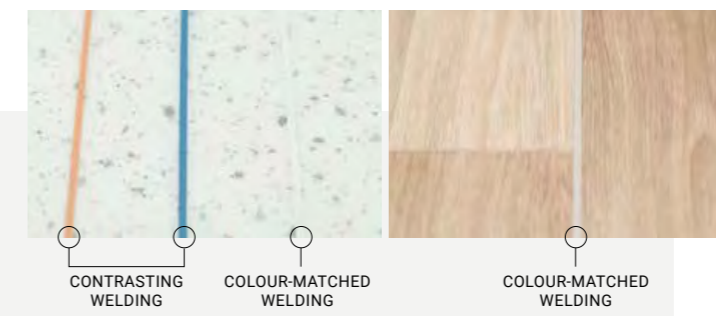


This is a summary of the full installation instructions. Scan for more details



CORONET 593

STEPS

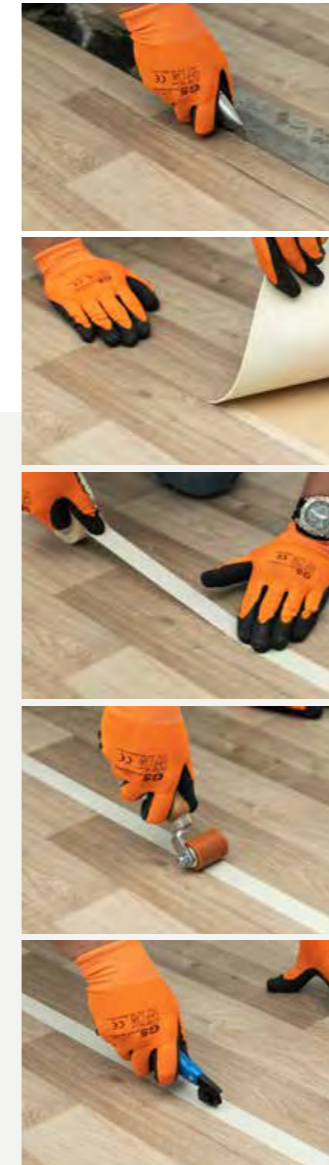


Cold welding: Invisiweld

Cold welding is the process of bringing two pieces of sheet vinyl flooring together using a chemical reaction rather than a heat input. The application of cold-welding liquid via a tube with a needle creates a nearly invisible seam on the flooring.

The Werner Müller cold-welding system offers 3 main advantages

- 1. An unrivalled needle**
A metal needle fixed firmly on the tube, simple and safe to use.
- 2. The strength of the weld**
A very strong weld – far exceeding European standards.
Tested, confirmed and documented.
- 3. Health protection**
Not harmful to health. Proven by tests carried out by a specialist, independent institute.

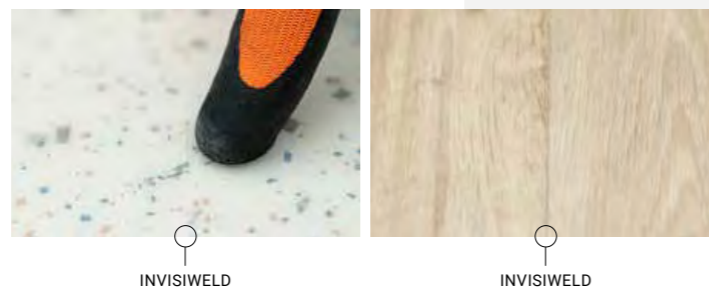

TOOLS



This is a summary of the full installation instructions. Scan for more details

Loose-lay tape

100 mm x 50 m

Loose-lay tape makes it possible to install sheet-vinyl flooring without the use of glues. With this specialised tape, your (semi-) loose-lay heterogeneous vinyl floor is guaranteed to stand its ground, while remaining easy to remove and replace. The tape guarantees 100% (semi-) loose-lay vinyl floor installation. For semi-loose-lay flooring, tape is used around the perimeter of the space and to connect adjoining floors to each other, while for loose-lay flooring, the tape is used only to connect adjoining floors.

STEPS



Order loose-lay tape using code 343915

Benefits for installers

- Quicker renovation of spaces
- Can be installed on top of existing floors
- Reduced preparation time
- No glue
- No odour
- No waiting time between stages
- Immediately suitable for occupation
- Up to 30% cost saving compared to adhesives
- 20% faster than glue-down installation
- Simple uplift and removal for Recover Take Back

Benefits for project owners

- Fast construction time
- Optimised installation cost
- No glue
- 100% recyclable through Recover Take Back
- No damage to the subfloor when replacing



This is a summary of the full installation instructions. Scan for more details


For Silento 55, Nomad, Logitex Ultimate 55 and Nerutex



Seamless design

Wood design with a unique trick up its sleeve.

An all-over wood pattern is not only beautiful to look at, but also easy to install. Just unroll for a great-looking floor in no time at all. **Without grooved plank outlines, there's no need to pattern match, so fitting is quick and easy.** And, by reducing installation waste, seamless design is a cost-effective and responsible choice.

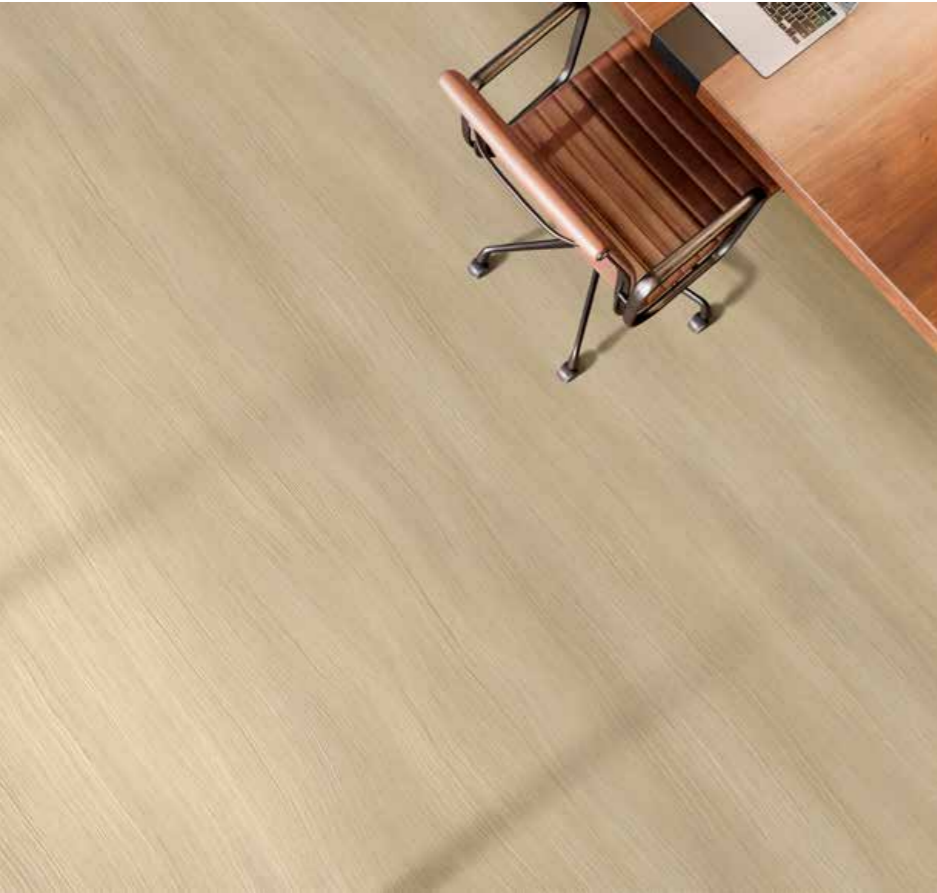

SCARLET T40

Effortless installation




QUICK INSTALLATION



COST EFFICIENT



LESS CUTTING WASTE

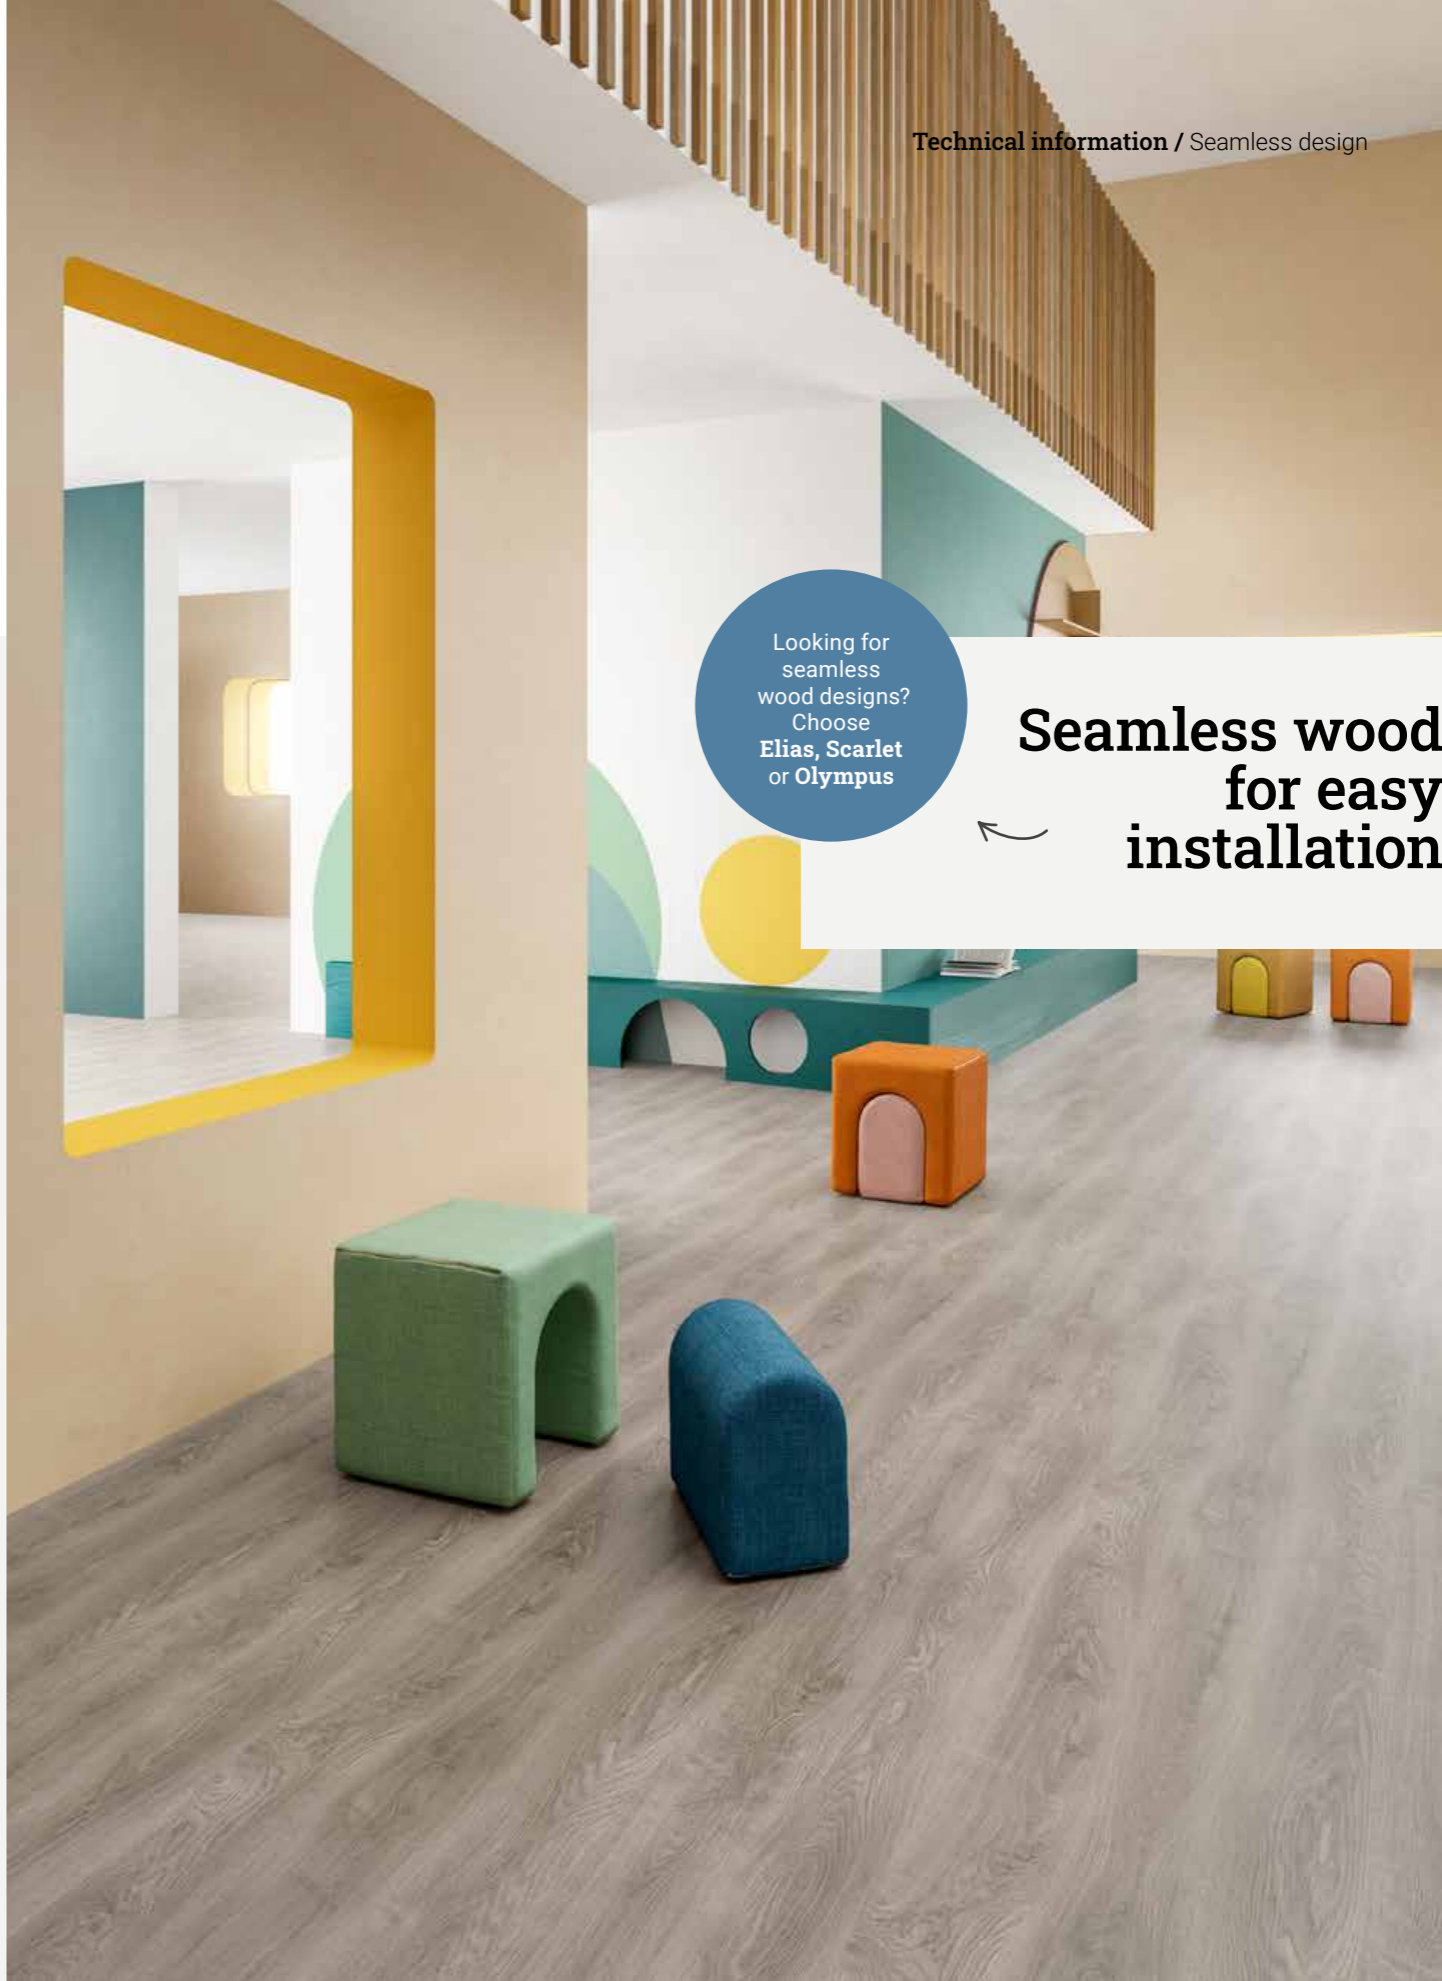

Looking for seamless wood designs? Choose Elias, Scarlet or Olympus

Seamless wood for easy installation

ELIAS T93

Order your free samples

Would you like to see and feel our vinyl flooring yourself? Order up to 7 free samples of your favourite floors and discover which one suits your project perfectly.

3 easy steps to order samples



Simply select the floor you like and add it to your cart to order free samples.

1. Choose up to 7 floor samples by simply clicking **'ADD TO CART'**.
2. Go to your shopping cart at the top right of the page.
3. Click **'PROCEED'** to enter your address details and complete your free order.

We also have entrance mats

Entrance mat
STEP UP
60.96 x 60.96 x 0.9cm
available in
4 colours

Step Up mats are available in four neutral yet captivating shades (400063888, 400063887, 400063886 and 400063885) that set the tone for whatever striking interior lies beyond the entrance. As a buffer between the outdoors and the inside, Step Up mats catch up to 80% of all incoming dirt, resulting in beautiful, flawless heterogeneous vinyl flooring throughout the rest of the building.

Case studies

Campus Nieuw Zuid Belgium

Comfort also comes first at Campus Nieuw Zuid, a student complex in Antwerp, Belgium. BOB 361 Architects combined Bolivia (Isafe 70) and Toronto (Iperform 70). These heterogeneous vinyl floors are easy to clean and environmentally friendly. Thanks to the extra Hyperguard+ protective layer on top of the strong standard wear layer, you need less water and cleaning products for a spotless floor. The heterogeneous vinyl is also less fragile, less sensitive to moisture and has good colourfastness.



Cwrt Angfora care home United Kingdom

Cwrt Angfora is a retirement housing complex of 40 flats. In a programme of modernisation IVC Commercial's Isafe 70 sheet vinyl safety flooring has been specified. Across 900m² of public areas and facilities, Isafe 70 was chosen for its ability to deliver unrestricted movement for wheelchairs and a safer surface underfoot for residents, while remaining durable and easy to maintain. Isafe 70 is available in a range of 26 wood, terrazzo, mineral and colour designs.



Colchester Institute United Kingdom


Colchester Institute provides education, professional development and technical skills to over 8,000 young people and adults every year. The canteen of the Colchester campus has recently been refurbished, with a floor finished in Iperform 70 heavy duty vinyl flooring from IVC Commercial. Iperform 70 is IVC Commercial's heavy duty heterogeneous vinyl floor that's designed to withstand high levels of use. Suited to the needs of education environments, Iperform 70 is also capable of delivering a long lasting look in projects where durability and easy cleaning are key. Incorporating IVC Commercial's Performance Barrier that adds strength and inhibits discolouration, all floors are rated Class 43 for wear and R10 for slip-resistance. Iperform 70 also features Hyperguard+ and Sanitec for a floor that's stain and scratch resistant, easy to clean and hygienic.



What our symbols mean



NOEMIE T04



COMPACT FLOORING

Compact flooring

Quality compact flooring is strong and impact resistant, with the lowest residual indentation of all our ranges.



ACOUSTIC FLOORING

Acoustic flooring

Our high-performance backing reduces sound, helping busy spaces feel quieter and more comfortable.



SAFETY FLOORING

Safety flooring - slip resistance

Featuring our HyperGrip top layer, engineered for permanent, wet and dry slip resistance.



12 YEARS WARRANTY

Warranty

Our warranty covers manufacturing defects and premature wear resulting from normal use.



TEXTILE BACKING

Textile backing

Saves time by smoothing out irregularities in the subfloor. Comfortable underfoot and has excellent acoustic properties.



BLACK TEXTILE BACKING

Black textile backing

Finished in smart black, our most luxurious textile backing delivers stability and strength in the most demanding environments.



TILE COVERING SOLUTION

Textile backing on tiled subfloors

Smooths the surface and covers joints up to 3 mm wide and 2 mm deep.



VERSATILE DESIGN

Versatile designs

A wide range of options, including on-trend designs and our best sellers.



LOOSE LAY

Loose lay


With two layers of glass fibre, the floor is dimensionally stable and stays fixed in place without the need for glue.



SEMI-LOOSE LAY

Semi-loose lay

Installation without glue. Use double-sided tape to fix securely in place.



THICKEST WEAR LAYER

Thickest wear layer

An extra-thick wear layer for superb performance and durability.



HYPERGUARD+

Hyperguard+

Hyperguard+ technology makes the floor extremely easy to maintain, and provides an extra layer of protection. It is also stain and scratch resistant.



PUR SHIELD

PUR shield

PUR shield technology makes the floor extremely easy to maintain, and provides an extra layer of protection. It is also stain and scratch resistant.



INVERTTECH

Inverttech

Our innovative technology uses PU lacquer then mechanical embossing for an even, dirt-resistant and attractively textured top layer.



SANITEC®

Sanitec®

A permanent treatment that inhibits the growth of bacteria on the surface and fungi in the subfloor.



COMFORTABLE UNDERFOOT

Comfortable underfoot


Soft and warm to the touch, offering a superb feeling of comfort.



FIRM FEELING

Firm feeling

A foamed floor with the quality and strength of compact backing. Soft and warm to the touch, offering a superb feeling of comfort.



INTENSE USAGE

Intense usage

Ideal for areas of heavy traffic, including offices with castor chairs.



QUICK INSTALLATION

Quick installation

Quick and easy to install, saving time and money.



COST EFFICIENT

Cost efficient

An affordable option for every project.



LESS CUTTING WASTE

Less cutting waste

With no need to match patterns, installing one of our seamless designs results in less waste.



EASY CLEAN

Easy clean

These low maintenance floors are particularly easy to clean.



CHIPS

Added chips

Coloured PVC particles added after printing for a realistic, three-dimensional effect.



100% RECYCLABLE

100% recyclable

Flooring installed loose lay or semi-loose lay is 100% recyclable through our Recover programme.



PHTHALATE FREE

Phthalate free

This collection is produced without the use of ortho-phthalates.

Our sustainability journey

ONE HOME	120
OUR SUSTAINABILITY JOURNEY THROUGH TIME	123
SMART USE OF RENEWABLE ENERGY	124
TOWARDS CIRCULARITY - RECOVER	126
CERTIFICATIONS	129

SUSTAINABILITY

One group, one vision

In 2022 Unilin launched One Home, our group-wide **sustainability strategy** with ambitious targets in several domains. We look into the environmental impact of our products and production processes, but also at how we live at home, at work and on our planet.

ONEHOME



PLANET HOME

Greenhouse gas emissions must be reduced or even completely eliminated. This is a major challenge for the manufacturing industry, as we still too often burn fossil fuels and end-of-life products. We need to switch to circularity, using **renewable or recycled materials** and making **recyclable products**.



YOUR HOME

A healthy, comfortable and sustainable living environment is more important than ever. The products we make must provide **added value to our customers**, without compromising on **health, comfort or sustainability**.





OUR HOME

Our company is a second home for **more than 8,000 employees**. We aim to create a **positive, stimulating and safe working environment** where they feel good and valued; an environment where everyone can challenge themselves and continue to grow. Our community, municipalities and neighbours also form a significant part of our story.

TIMELINE

Our sustainability journey through time

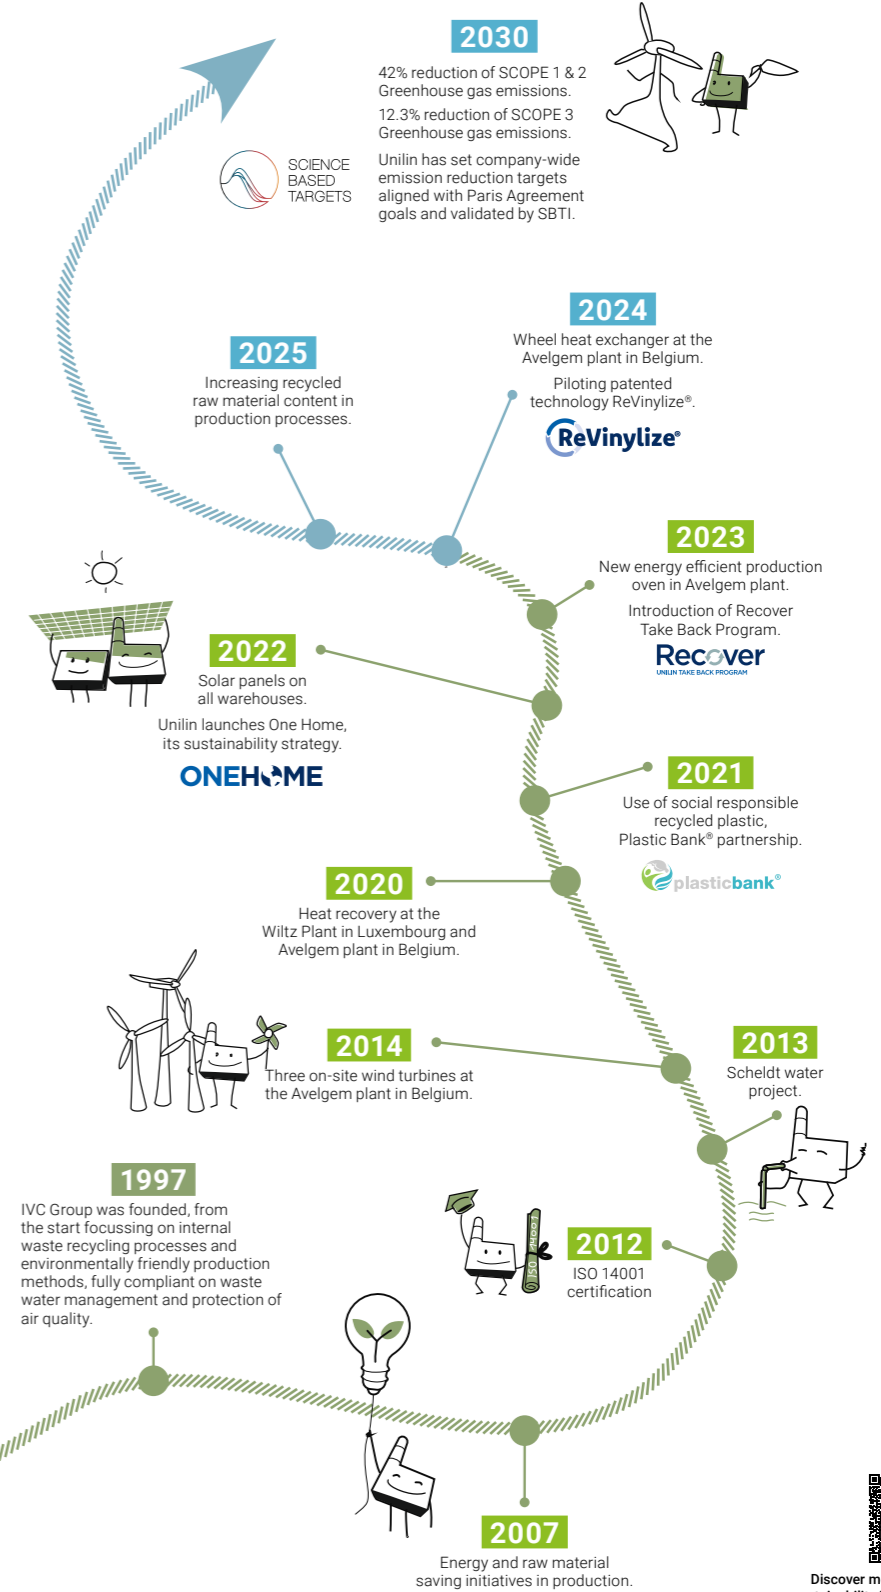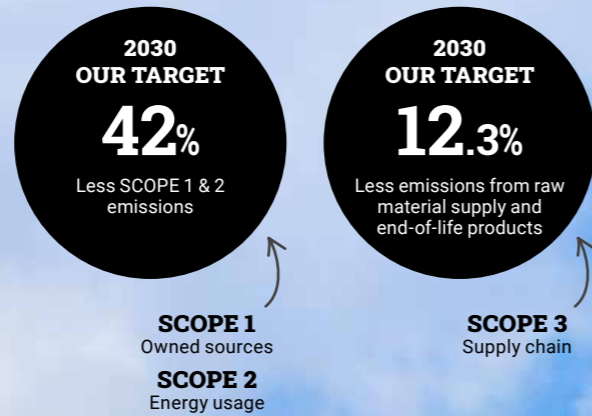


Discover more about our sustainability journey in our Sustainability brochure

NATURAL RESOURCES

Smart use of renewable energy

Sun

We use solar energy to make our fleet greener, in every sense of the word. For instance, we use the power from our solar panels to charge our employees' electric cars and e-bikes. Furthermore, even the forklifts in our warehouses are charged with solar energy. The result is a great amount of kilometres with zero emissions.

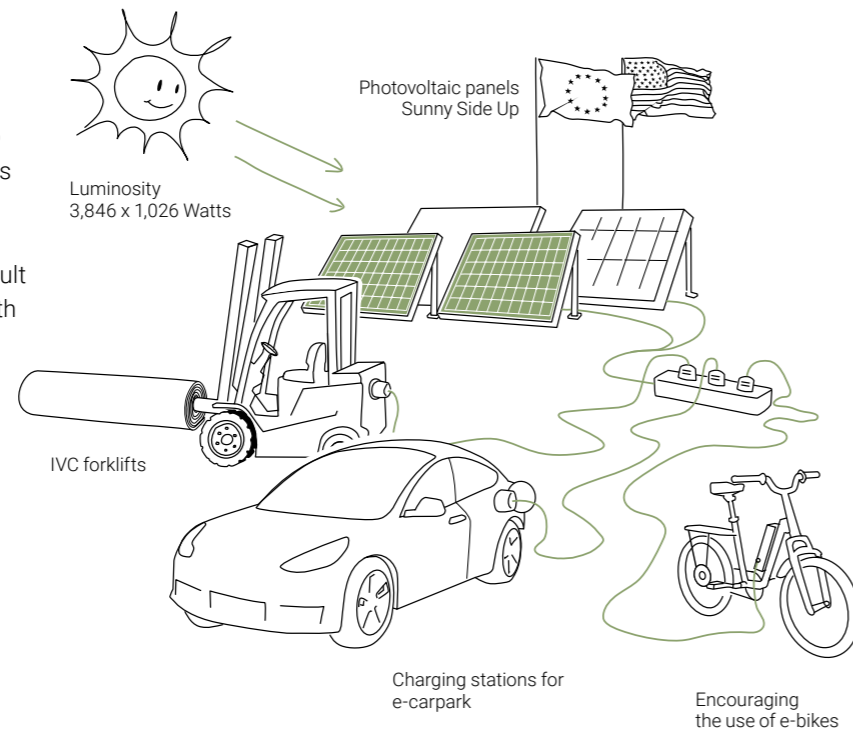

Solar Panels


The **IVC Flooring Development Centre** in Waregem (Belgium) has been turned into a sustainable base. It uses heat recovery, intelligent lighting technology and is powered by solar panels on the building.

Solar panels contribute significantly to reducing our plants' carbon footprint. We installed more than 6,000 solar panels on the roof of our **Avelgem plant** generating **3,076 MWh per year**.




Wind

In 2014, three wind turbines were installed on the Avelgem production site. The turbines produce around **11,000 MWh of renewable energy** each year. That's about as much as the yearly electricity consumption of 3,000 Flemish households. With this clean energy we power our own production facilities. Avelgem Green Power allows IVC and our **partner communities** to work together to promote green energy.

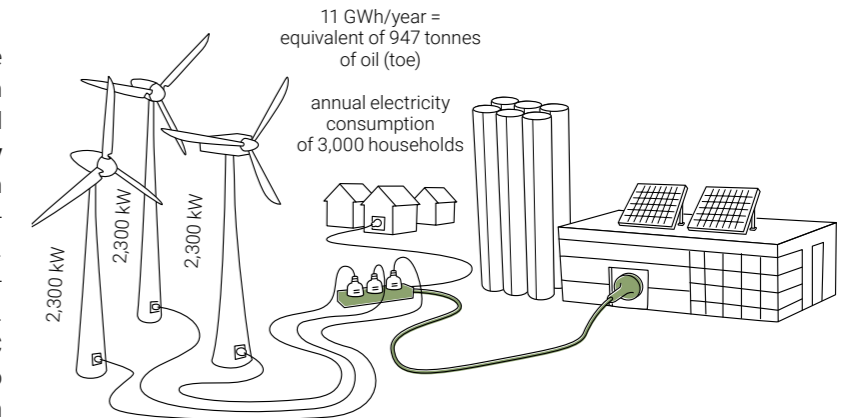

Water

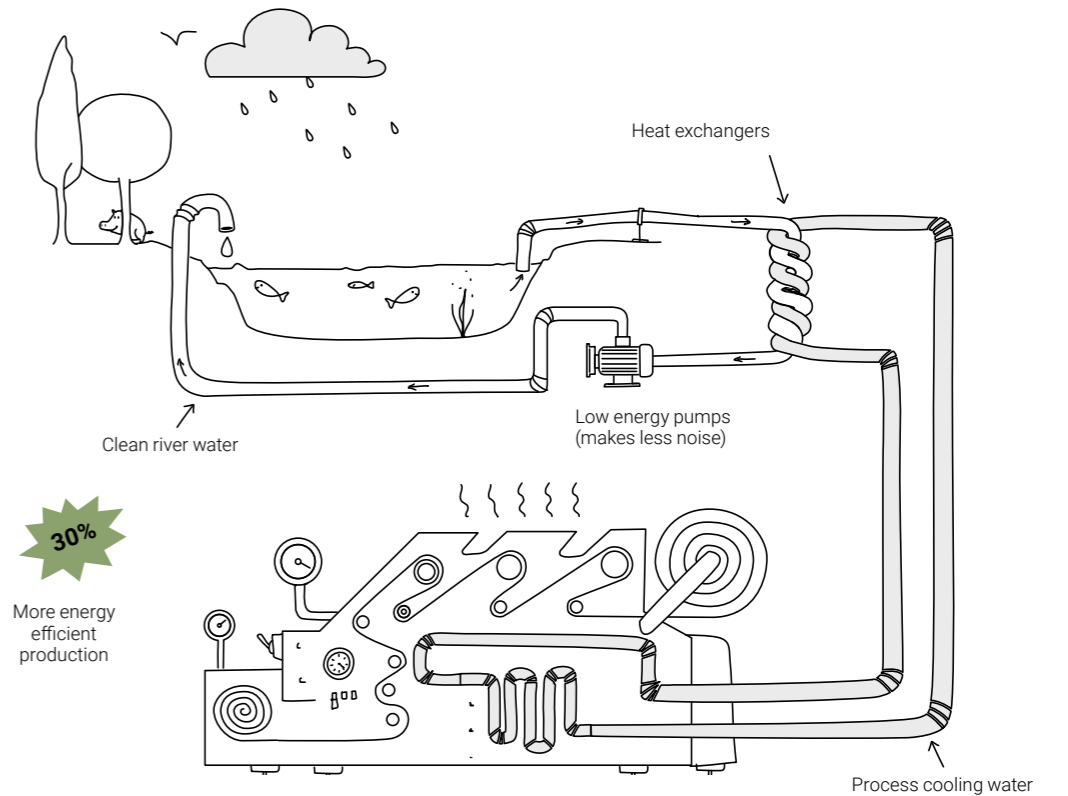

The manufacturing of vinyl flooring requires cooling water to absorb heat in the different stages of production. IVC has invested in a system that uses surface water from the nearby **river Scheldt** as a **secondary coolant**. Using only a minimal amount of energy, river water is pumped up and sent along the closed loop flow of our Avelgem plant's process cooling water.

The exchange of thermal energy (up to 4,000 kw) is achieved through state-of-the-art heat exchangers, so there is no direct contact between the river water and the process water en route.

Using minimal electricity compared to other cooling systems, these innovations have resulted in a **30% increase of energy efficiency** in the overall production of vinyl flooring. By eliminating the need for machine-driven refrigeration, we've also significantly **reduced on-site noise** and created better working conditions.

TOWARDS CIRCULARITY


Recover, A new life for floors

We try to reduce our environmental impact not only by producing efficiently, but also by the way we use materials. Today, production waste from sheet vinyl flooring and post-installation materials returned through our Recover Take Back Program are being recycled or repurposed for use in the backing of LVT products. This way, we work towards our goal of a more circular product.



How we recover sheet vinyl flooring

MORE INFO:

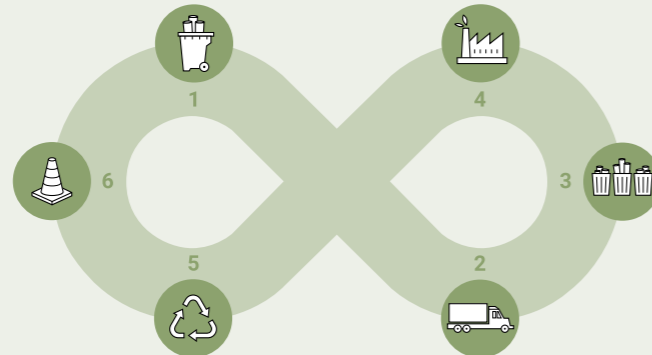

1. COLLECTING

After installation or at end-of-life, old floors and leftover rolls are collected into bags or on pallets. The customer contacts us to arrange collection.

2. TRANSPORT

Depending on what we've collected, we have several options to bring the waste back: to our recycling centres, send it to one of our partners or send it back to base.

3. SORTING

Before the collected materials are ready for recycling, they need to be sorted and cleaned prior to being shredded.

4. RECYCLING

At recycling centres, we convert flooring to raw materials for LVT or other applications, such as street furniture.

5. NEW FLOORING

The recycled material is used as raw material for new LVT flooring.

6. OTHER APPLICATIONS

If returned material can't be recycled into new flooring, because of contamination or not being REACH compliant, we then look for other applications.

Our partners in Recover are growing

We have several B2B partners working to take back sheet vinyl flooring, and the interest is growing globally. Recent partners who are main contributors to our programme are Trirecycle (UK), Jordan (DE), JMT Floorcoverings (NL), Cotap 5 (NL), Rubik (DE) and V-Podlahy (CZ), as well as many French customers and distributors who collect post-installation sheet vinyl flooring. Together, we are working on joint goals towards a more circular flooring industry.

Introducing our partners to the recycling process

Last year, JMT Floorcoverings recovered 6 tonnes of sheet vinyl flooring. We visited a recycling centre with them, observing how 4 tonnes was recycled into granules intended for specific, non-flooring applications (downcycling). Another 1.2 tonnes was used for an innovative pilot, recycling textile-backed vinyl into granules that can be reused as a raw material for our LVT flooring.



King Charles' Coronation

United Kingdom

For King Charles' Coronation in Westminster Abbey, London, we supplied 726 m² of Ultimate Wood & Stone and Bingo sheet vinyl flooring, totalling 1.2 tonnes. After the event, we recovered and fully recycled the flooring, demonstrating our commitment to sustainability.



CASE STUDIES

Collecting and recycling our sheet vinyl flooring.



Certifications for our sustainability journey

At IVC, we aim to add value to our customers' living spaces without compromising on health, comfort or sustainability. In order to do so, we rely on third-party certifications to provide transparency in terms of the environmental impact and safety of our products.

Member of the green industry

As a leader in flooring, we belong to a wide range of organisations that represent the industry. We are a member of ERFMI (EU), FEB (DE), DGNB (DE) and Kaléi (FR). With both ERFMI and Kaléi we are working together to provide our customers with collective Environmental Product Declarations (EPD) and Fiches de Déclaration Environnementale et Sanitaire (FDES), showing our industry efforts towards greener products. In Belgium, we are a member of the Fedustria and Voka employer organisations. As part of these organisations, we consider it important to work together for a green industry.

Environmental management

Since 1997 IVC has made substantial efforts towards a precisely tailored, fully integrated environmental management system. In 2012 we were awarded ISO 14001 certification, showcasing our commitment to environmental responsibility. This certification for ecological performance is a good reflection of our past efforts and current compliance with environmental rules and regulations.

Additionally we only purchase and process raw materials that are in line with the REACH regulations and only work with suppliers who comply with these regulations. In this way we are able to guarantee the integrity and quality of the end product that we deliver to the end user.



Quality management

As part of our ISO 9001 certification, we have implemented a quality management system that enables us to comply with the strictest regulations. This demonstrates our ability to consistently provide products that meet customer and regulatory requirements.

Ecolabels

Together with temperature and humidity, air quality is one of the most important factors in interior environments. We want to make sure that our vinyl flooring – often a central part of people's living spaces – contributes to healthy and safe living spaces, and to ensure that they don't pose any health risks to our end users. To do so, we make sure that our finished products intended for interior use comply with some of the strictest indoor emission labels.



Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Flooring type / Type de couverture - Type vloer - Fußbodenart	
Heterogeneous PVC / PVC hétérogène - Heterogene PVC - Heterogene PVC	
Level of use / Classe d'usage - Gebruiksklasse - Eignungsklasse	EN ISO 10874
Total thickness / Epaisseur totale - Totale dikte - Gesamtdicke	EN ISO 24346
Wear layer / Couche d'usure - Slijtlaag - Nuttschicht	EN ISO 24340
Wear layer PUR treatment / Traitement polyuréthane - PUR slijtlaag behandeling - Schutz vor Schmutz PUR	
Fonghi-bacterio static treatment / Traitement fonghi-bactériostatique - Schimmel-bacteriewerende behandeling - Keimfreie Oberfläche	ISO846-A - ISO22196
Total weight/m² / Poids total/m ² - Totaal gewicht/m ² - Gewicht/m ²	EN ISO 23997
Width / Largeur - Breedte - Breite	EN ISO 24341
Standard Length / Longueur standard - Standaardlengte - Standardlänge	EN ISO 24341
Weight of standard roll / Poids standard des rouleaux - Standaard rolgewicht - Standard-Rollengewicht	
Inflammability / Classement feu - Brandklasse - Brandverhalten	EN 13501
Slip resistance / Glissance - Antislip - Rutschfest	EN 13893
Slip restraint / Résistance au glissement - Slipweerstand - Rutschhemmung	EN 16165 Annex B
Slip classification / Résistance au glissement - Slipweerstand - Rutschhemmung	EN 13845
Abrasion resistance test	EN 13845
RRL Pendulum test (Wet Test)	RRL
Residual indentation / Poinçonnement rémanent - Restindruk - Eindrückverhalten	EN ISO 24343-1
Furniture leg resistance / Résistance au pied de meuble - Meubelpoottest - Möbelschubtest	EN ISO 16581
Curling / Incurvation - Krulling - Schüsselung	EN ISO 23999
Electrical resistance / Résistance électrique - Elektrische weerstand - Elektrischer Widerstand	EN 1081
Static electrical propensity / Accumulation de charges électrostatiques - Electrostatistische Propensiteit - Elektrostatistische Verhaltung	EN 1815
Dimensional stability / Stabilité dimensionnelle - Dimensionele stabiliteit - Massänderung - Massänderung Average value / valeur moyenne - gemiddelde waarde - Durchschnittswert	EN ISO 23999
Thermal conductivity / Conductivité thermique - Warmtedoorgangscoefficient - Wärmeleitfähigkeit	EN 12667
Heat insulation / Isolation thermique - Thermische isolatie - Wärmedurchlasswiderstand	EN 12667
Binder quantity in wear layer / Taux de liant dans la couche d'usure - Hoeveelheid bindmiddel in slijtlaag - Bindemittelmengde in der Nuttschicht	EN ISO 10582
Abrasion group / Groupe d'abrasion - Slijtageweerstand - Verschleißverhalten	ISO 660-2
Indoor air quality / Qualité de l'air intérieur - Binnenmilieu - Raumluftqualität	
Acoustic insulation / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß	EN ISO 717-2
Castor chair resistance / Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhlrollenfestigkeit	EN ISO 4918
Castor type / Type de chaises à roulettes - Type stoelwielen - Stuhlrolle Typ	EN 12529
Light fastness / Résistance à la lumière - Lichtechtheid - Lichtechtheit	ISO 105-B02
Underfloor heating / Chauffage par le sol - Vloerverwarming - Bodenheizung	EN 12524
Resistance to chemicals / Résistance aux produits chimiques - Chemicaliënresistentie - Chemikalienbeständigkeit	EN ISO 26987
Hot welding / Soudage thermique - Warmlassen - Thermische Verschweißung	
Cold welding / Soudage à froid - Koud lassen - Kaltverschweißung	Invisiweld
Warranty years / Garantie ans - Garantie in jaren - Garantie Jahren	

The warranty covers manufacturing defects and premature wear in the event of normal use.

La garantie couvre les vices de fabrication et l'usure précoce en usage normal / De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik.

Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung.



Ranger	Iperform 70	Adriatico 70	Tempo	Centra 70	Optimise 70	Pionieer
Compact flooring	Compact flooring	Compact flooring	Compact flooring	Compact flooring	Acoustic flooring	Acoustic flooring
EN ISO 10582	EN ISO 10582	EN ISO 11638	EN ISO 10582	EN ISO 26986	EN ISO 11638	EN ISO 11638
34 - 43	23 - 34 - 43	23 - 34 - 42	23 - 33	23 - 34 - 43	23 - 34 - 42	34-42
2,00 mm	2,15 mm	2,00 mm	2,00 mm	2,00 mm	3,40 mm	2,50 mm
0,80 mm	0,70 mm	0,70 mm	0,50 mm	0,70 mm	0,70 mm	0,70 mm
PUR shield	Hyperguard+	Hyperguard+	Hyperguard+	Hyperguard+	Hyperguard+	PUR shield
-	Sanitec®	-	-	-	Sanitec®	-
ca. 2.800 g	ca. 2.575 g	ca. 2.050 g	ca. 2.358 g	ca. 2.543 g	ca. 2.904 g	ca. 2.250 g
2-4 m	2-4 m	2-4 m	2-4 m	2-3-4 m	2 m	2-4 m
ca. 20 m	ca. 25 m	ca. 25 m	ca. 25 m	ca. 25 m	ca. 25 m	ca. 25 m
ca. 113 - 225 kg	ca. 126 - 252 kg	ca. 102,5-105 kg	ca. 122-244 kg	ca. 131-196,5-262 kg	ca. 149 kg	ca. 113-225 kg
Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1	Bfl-S1
DS	DS	DS	DS	DS	DS	DS
R10-R11	R10	R10	R10	R10	R10	R10
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
norm ≤ 0,10 mm 0,02 mm	norm ≤ 0,10 mm 0,05 mm	norm ≤ 0,20 mm 0,10 mm	norm ≤ 0,20 mm	norm ≤ 0,20 mm 0,05 mm	norm ≤ 0,20 mm 0,12 mm	norm ≤ 0,20 mm 0,12 mm
PASS	PASS	PASS	PASS	PASS	PASS	PASS
norm ≤ 8 mm	norm ≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm
1,00 x 10 ⁹ Ohm	1,40 x 10 ⁹ Ohm	NPD*	1,74 x 10 ⁹ Ohm	≤ 10 ⁹ Ohm	1,10 x 10 ⁹ Ohm	1,00 x 10 ⁹ Ohm
≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)
norm ≤ 0,40%	norm ≤ 0,40% 0,03%	norm ≤ 0,40% ≤ 0,03%	norm ≤ 0,10%	norm ≤ 0,40% 0,05%	norm ≤ 0,40% 0,05%	norm ≤ 0,40%
0,160 W/(m.K)	0,157 W/(m.K)	0,117 W/(m.K)	0,147 W/(m.K)	0,190 W/(m.K)	0,106 W/(m.K)	0,095 W/(m.K)
0,013 m ² . K/W	0,014 m ² . K/W	0,425 m ² . K/W	0,0117 m ² . K/W	0,0101 m ² . K/W	0,0319 m ² . K/W	0,028 m ² . K/W
Type I	Type I	Type I	Type I	Type I	Type I	Type I
Class T	Class T	Class T	Class T	Class T	Class T	Class T
LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC
ΔLw 9 dB	ΔLw 7 dB	ΔLw 16 dB	ΔLw 8 dB	ΔLw 7 dB	ΔLw 19 dB	ΔLw 18 dB
Pass	Pass	Pass	Pass	Pass	Pass	Pass
Type W	Type W	Type W	Type W	Type W	Type W	Type W
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C	Suitable ≤27°C
Very good	Very good	Very good	Very good	Very good	Very good	Very good
Available	Available	Available	Available	Available	Available	Available
Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable
20	15	7	12	7	12	15



Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Flooring type / Type de couverture - Type vloer - Fußbodenart	
Heterogeneous PVC / PVC hétérogène - Heterogene PVC - Heterogene PVC	
Level of use / Classe d'usage - Gebruiksklasse - Eignungsklasse	EN ISO 10874
Total thickness / Epaisseur totale - Totale dikte - Gesamtdicke	EN ISO 24346
Wear layer / Couche d'usure - Slijtlaag - Nuttschicht	EN ISO 24340
Wear layer PUR treatment / Traitement polyuréthane - PUR slijtlaag behandeling - Schutz vor Schmutz PUR	
Fonghi-bacterio static treatment / Traitement fonghi-bactériostatique - Schimmel-bacteriewerende behandeling - Keimfreie Oberfläche	ISO846-A - ISO22196
Total weight/m² / Poids total/m ² - Totaal gewicht/m ² - Gewicht/m ²	EN ISO 23997
Width / Largeur - Breedte - Breite	EN ISO 24341
Standard Length / Longueur standard - Standaardlengte - Standardlänge	EN ISO 24341
Weight of standard roll / Poids standard des rouleaux - Standaard rolgewicht - Standard-Rollengewicht	
Inflammability / Classement feu - Brandklasse - Brandverhalten	EN 13501
Slip resistance / Glissance - Antislip - Rutschfest	EN 13893
Slip restraint / Résistance au glissement - Slipweerstand - Rutschhemmung	EN 16165 Annex B
Slip classification / Résistance au glissement - Slipweerstand - Rutschhemmung	EN 13845
Abrasion resistance test	EN 13845
RRL Pendulum test (Wet Test)	RRL
Residual indentation / Poinçonnement rémanent - Restindruk - Eindrückverhalten	EN ISO 24343-1
Furniture leg resistance / Résistance au pied de meuble - Meubelpoottest - Möbelschubtest	EN ISO 16581
Curling / Incurvation - Krulling - Schüsselung	EN ISO 23999
Electrical resistance / Résistance électrique - Elektrische weerstand - Elektrischer Widerstand	EN 1081
Static electrical propensity / Accumulation de charges électrostatiques - Electrostatistische Propensiteit - Elektrostatistische Verhaltung	EN 1815
Dimensional stability / Stabilité dimensionnelle - Dimensionele stabiliteit - Massänderung - Massänderung Average value / valeur moyenne - gemiddelde waarde - Durchschnittswert	EN ISO 23999
Thermal conductivity / Conductivité thermique - Warmtedoorgangscoefficient - Wärmeleitfähigkeit	EN 12667
Heat insulation / Isolation thermique - Thermische isolatie - Wärmedurchlasswiderstand	EN 12667
Binder quantity in wear layer / Taux de liant dans la couche d'usure - Hoeveelheid bindmiddel in slijtlaag - Bindemittelmengde in der Nuttschicht	EN ISO 10582
Abrasion group / Groupe d'abrasion - Slijtageweerstand - Verschleißverhalten	ISO 660-2
Indoor air quality / Qualité de l'air intérieur - Binnenmilieu - Raumluftqualität	
Acoustic insulation / Efficacité acoustique - Kontaktgeluidisolatie - Trittschallverbesserungsmaß	EN ISO 717-2
Castor chair resistance / Résistance aux chaises à roulettes - Bestand tegen stoelwielen - Stuhlrollenfestigkeit	EN ISO 4918
Castor type / Type de chaises à roulettes - Type stoelwielen - Stuhlrolle Typ	EN 12529
Light fastness / Résistance à la lumière - Lichtechtheid - Lichtechtheit	ISO 105-B02
Underfloor heating / Chauffage par le sol - Vloerverwarming - Bodenheizung	EN 12524
Resistance to chemicals / Résistance aux produits chimiques - Chemicaliënresistentie - Chemikalienbeständigkeit	EN ISO 26987
Hot welding / Soudage thermique - Warmlassen - Thermische Verschweißung	
Cold welding / Soudage à froid - Koud lassen - Kaltverschweißung	Invisiweld
Warranty years / Garantie ans - Garantie in jaren - Garantie Jahren	


The warranty covers manufacturing defects and premature wear in the event of normal use.

La garantie couvre les vices de fabrication et l'usure précoce en usage normal / De garantie dekt fabricagefouten en voortijdig afslijten bij normaal gebruik.

Die Garantie deckt Herstellungsfehler und vorzeitigen Verschleiß bei normaler Nutzung.



Voyager NXT	Silento 55	Nomad	Logitex Ultimate 55	Nerutex	Isafe 70
Acoustic flooring	Acoustic flooring	Loose-lay flooring	Textile backing	Acoustic textile backing	Safety flooring
EN 26986	EN ISO 11638	ISO 11638	EN 650	EN 650	ISO 10582-EN 13845
33-42	23 - 33 - 42	23 - 32	23 - 33 - 42	23 - 33	34 - 43
2,20 mm	3,20 mm	3,90 mm	3,20 mm	2,80 mm	2,15 mm
0,60 mm	0,55 mm	0,45 mm	0,55 mm	0,50 mm	0,70 mm
PUR shield	Hyperguard+	Hyperguard+	Hyperguard+	Hyperguard+	HyperGrip
-	-	-	-	-	Sanitec®
1.985 g	2.140 g	ca. 2.850 g	ca. 2.124 g	ca. 2.300 g	ca. 2.575 g
2-(3)-4 m	2 m	2-4 m	2-4 m	2-4 m	2 m
ca. 25 m	ca. 25 m	ca. 20 m	ca. 25 m	ca. 30 m	ca. 20 m
ca. 99,5-149-198,5 kg	ca. 110 kg	ca. 116-232 kg	ca. 102-204 kg	ca. 138-270 kg	ca. 118 kg
Bfl-S1	Bfl-S1	Cfl-S1	Cfl-S1	Cfl-S1	Bfl-S1
DS	DS	DS	DS	DS	DS
R10	R10	R10	R11	R9 - R10	R12
-	-	-	-	-	Class ESf - ESb
-	-	-	-	-	< 10% particles lost over 50.000 Cycles
-	-	-	-	-	36+ low slip risk potential
norm ≤ 0,20 mm 0,08 mm	norm ≤ 0,20 mm 0,16 mm	≤ 0,20 mm	norm ≤ 0,20 mm	norm ≤ 0,20 mm	norm ≤ 0,10 mm 0,04 mm
PASS	PASS	PASS	PASS	PASS	Very good
≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm	≤ 8 mm
4,16 x 10 ⁸ Ohm	2,6 x 10 ⁷ Ohm	1,64 x 10 ⁸ Ohm	7,8 x 10 ⁸ Ohm	9,4 x 10 ⁸ Ohm	6,4 x 10 ⁸ Ohm
≤ 2kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)	0,4 kV (antistatic)	≤ 2kV (antistatic)	≤ 2kV (antistatic)
norm ≤ 0,40%	norm ≤ 0,20% 0,14%	norm ≤ 0,40% 0,05%	norm ≤ 0,40% 0,10%	norm ≤ 0,40% 0,10%	norm ≤ 0,40% < 0,10%
0,100 W/(m.K)	0,088 W/(m.K)	0,091 W/(m.K)	0,070 W/(m.K)	0,68 W/(m.K)	0,164 W/(m.K)
0,52 m ² . K/W	0,0358 m ² . K/W	0,0422 m ² . K/W	0,0449 m ² . K/W	0,0388 m ² . K/W	0,0134 m ² . K/W
Type I	Type I	Type I	Type I	Type I	Type I
Class T	Class T	Class T	Class T	Class T	Class T
LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC	LOW VOC
ΔLw 16 dB	ΔLw 20 dB	ΔLw 20 dB	ΔLw 19 dB	ΔLw 18 dB	ΔLw 5 dB
Pass	Pass	Pass	Pass	Pass	Pass
Type W	Type W	Type W	Type W	Type W	Type W
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C	Suitable ≤ 27°C
Very good	Very good	Very good	Very good	Very good	Very good
Available	Available	Available	Available	Available	Available
Suitable	Suitable	Suitable	Suitable	Suitable	Suitable
10	12	12	12	12	15





A BRAND OF
 UNILIN

Vinyl on a roll

www.ivc-commercial.com

